

# Colorado Department of Public Health and Environment

# **OPERATING PERMIT**

Bill Barrett Corporation Bailey Compressor Station

Issued: June 1, 2012

# AIR POLLUTION CONTROL DIVISION COLORADO OPERATING PERMIT

FACILITY NAME: Bailey Compressor OPERATING PERMIT NUMBER

Station

FACILITY ID: 045/1477

ISSUE DATE: June 1, 2012 EXPIRATION DATE: June 1, 2017

MODIFICATIONS: See Appendix F of Permit

Issued in accordance with the provisions of Colorado Air Pollution Prevention and Control Act, 25-7-101 et seq. and applicable rules and regulations.

09OPGA339

ISSUED TO: PLANT SITE LOCATION:

Bill Barrett Corporation Bailey Compressor Station

1099 18<sup>th</sup> Street, Suite 2300 E1/2 SESE, Section 22 – T6S-R92W

Denver, CO 80246 Garfield County, CO

INFORMATION RELIED UPON

Operating Permit Application Received: October 20, 2009

And Additional Information Received: March 4, 2010, September 27, 2011

Nature of Business: Natural Gas Compression

Primary SIC: 1311

RESPONSIBLE OFFICIAL FACILITY CONTACT PERSON

Name: Duane Zavadil Name: Peg A. Young

Title: Sr. Vice President, Government Title: Environmental, Health and Safety

and Regulatory Affairs Coordinator

Phone: (303) 312-8128 Phone: (303) 312-8120

SUBMITTAL DEADLINES – Note: Dates will be set by permit issuance date, the dates below are provided as an example

Semi-Annual Monitoring Periods: June 1 – November 30, December 1 – May 31 Semi-Annual Monitoring Reports: Due January 1 and July 1, 2013 & subsequent years

Annual Compliance Periods: June 1 – May 31

Annual Compliance Certification: Due July 1, 2013 & subsequent years

Note that the Semi-Annual Monitoring Reports and Annual Compliance report must be received at the Division office by 5:00 p.m. on the due date. Postmarked dates will not be accepted for the purposes of determining the timely receipt of those reports.

# **TABLE OF CONTENTS:**

| SECTI    | ION I - General Activities and Summary   | 1  |
|----------|--|----|
| 1.       | Permitted Activities   | 1  |
| 2.       | Alternative Operating Scenarios (ver 10/1/2011)  | 2  |
| 3.       | Prevention of Significant Deterioration  |    |
| 4.       | Accidental Release Prevention Program (112(r))   |    |
| 5.       | Compliance Assurance Monitoring (CAM)  |    |
| 6.       | Summary of Emission Units  |    |
|          | ION II - Specific Permit Terms   |    |
| 1.       | ENG01 - 02: Two (2) Caterpillar G3612 Compressor Engines, Rated at 3665 HP Each  |    |
| 1.       | ENG01 - 02. Two (2) Caterpillar G3012 Compressor Engines, Rated at 3003 HF Each  |    |
|          | ENG03 - 00. Four (4) Caterpinar G3616 Compressor Engines, Rated at 4890 HP Each<br>ENG07: One (4) Caterpillar G3612 or G3616 Compressor Engine, Rated at 3665 HP or 4890 |    |
|          | HP   |    |
| 2        |  |    |
| 2.       | TEG01 - 04: Four (4) TEG Dehydrators, Rated at 40 MMscf/d Each   |    |
| 3.       | TNK01 - 07: Condensate Tank Battery, Seven (7) Storage Tanks, 400 bbl Capacity Each  |    |
| 4.       | FUG: Fugitive VOC Emissions from Equipment Leaks   |    |
| 5.       | FLARE: Flare   |    |
| 6.       | LOADING: Tank Truck Loadout  |    |
| 7.       | Facility Wide  |    |
| 8.       | Portable Monitoring (ver 6/1/06)   | 30 |
| SECTI    | ON III - Permit Shield   | 32 |
| 1.       | Specific Non-Applicable Requirements   | 32 |
| 2.       | General Conditions   |    |
| 3.       | Streamlined Conditions   |    |
| SECTI    | ION IV - General Permit Conditions (ver 11/16/2010)  | 34 |
| 1.       | Administrative Changes   |    |
| 2.       | Certification Requirements   |    |
| 3.       | Common Provisions  |    |
| 3.<br>4. | Compliance Requirements  |    |
| _        | Emergency Provisions   |    |
| 5.<br>6  | Emission Controls for Asbestos   |    |
| 6.<br>7  |  |    |
| 7.       | Emissions Trading, Marketable Permits, Economic Incentives   |    |
| 8.       | Fee Payment  |    |
| 9.       | Fugitive Particulate Emissions   |    |
| 10.      | Inspection and Entry   |    |
| 11.      | Minor Permit Modifications   |    |
| 12.      | New Source Review  |    |
| 13.      | No Property Rights Conveyed  |    |
| 14.      | Odor   |    |
| 15.      | Off-Permit Changes to the Source   |    |
| 16.      | Opacity  |    |
| 17.      | Open Burning   |    |
| 18.      | Ozone Depleting Compounds  |    |
| 19.      | Permit Expiration and Renewal  |    |
| 20.      | Portable Sources   |    |
| 21.      | Prompt Deviation Reporting   | 41 |

# **TABLE OF CONTENTS:**

| 22.  | Record Keeping and Reporting Requirements                | 42 |
|------|--|----|
| 23.  | Reopenings for Cause                                     |    |
| 24.  | Section 502(b)(10) Changes                               | 43 |
| 25.  | Severability Clause                                      |    |
| 26.  | Significant Permit Modifications                         | 44 |
| 27.  | Special Provisions Concerning the Acid Rain Program      | 44 |
| 28.  | Transfer or Assignment of Ownership                      | 44 |
| 29.  | Volatile Organic Compounds                               |    |
| 30.  | Wood Stoves and Wood burning Appliances                  | 45 |
| APPE | NDIX A - Inspection Information                          |    |
| 1.   | Directions to Plant:                                     |    |
| 2.   | Safety Equipment Required:                               |    |
| 3.   | Facility Plot Plan:                                      |    |
| 4.   | List of Insignificant Activities:                        | 1  |
| APPE | NDIX B   |    |
| Repo | orting Requirements and Definitions                      | 1  |
| Mon  | nitoring and Permit Deviation Report - Part I            | 5  |
| Mon  | nitoring and Permit Deviation Report - Part II           | 7  |
| Mon  | nitoring and Permit Deviation Report - Part III          | 9  |
| APPE | NDIX C   |    |
|      | uired Format for Annual Compliance Certification Reports |    |
| APPE | NDIX D   | 1  |
|      | fication Addresses                                       |    |
| APPE | NDIX E   | 1  |
|      | nit Acronyms   |    |
| APPE | NDIX F   |    |
|      | nit Modifications  |    |
| APPE | NDIX G   |    |
|      | ine AOS Applicability Reports                            |    |
|      |  |    |

# **SECTION I - General Activities and Summary**

#### 1. Permitted Activities

1.1 The Bailey Compressor Station is a natural gas compression facility as defined under Standard Industrial Classification 1311. The facility gathers gas from surrounding well sites via a gathering pipeline system. The gas undergoes a natural separation process in the inlet separator that separates the gas from the liquids. The liquids go to the on-site storage tanks. The gas then goes to the compression stage where it is compressed from field pressure to approximately 1000psi. The compressed gas then goes through the TEG dehydration units to remove water to meet pipeline specifications. The dehydrated gas is then routed to the sales gas pipeline.

The facility is located approximately 5 miles south of Silt in Garfield County on Alta Mesa Road. The area in which the plant operates is designated as attainment for all criteria pollutants.

There are no affected states within 50 miles of the plant. The following Federal Class I designated area is within 100 kilometers of the plant: Black Canyon of the Gunnison National Park, West Elk Wilderness Area, Flattops Wilderness Area, and Maroon Bells – Snowmass Wilderness Area

- 1.2 Until such time as this permit expires or is modified or revoked, the permittee is allowed to discharge air pollutants from this facility in accordance with the requirements, limitations, and conditions of this permit.
- 1.3 The Operating Permit incorporates the applicable requirements contained in the underlying construction permits, and does not affect those applicable requirements, except as modified during review of the application or as modified subsequent to permit issuance using the modification procedures found in Regulation No. 3, Part C. These Part C procedures meet all applicable substantive New Source Review requirements of Part B. Any revisions made using the provisions of Regulation No. 3, Part C shall become new applicable requirements for purposes of this Operating Permit and shall survive reissuance. This permit incorporates the applicable requirements (except as noted in Section II) from the following construction permits: 07GA0569.
- All conditions in this permit are enforceable by US Environmental Protection Agency, Colorado Air Pollution Control Division (hereinafter Division) and its agents, and citizens unless otherwise specified. **State-only enforceable conditions are:** Permit Condition Number(s): Section II Conditions 1.11, 2.6 and 3.4 and Section IV Conditions 3.d, 3.g (last paragraph), 14 and 18 (as noted).
- 1.5 All information gathered pursuant to the requirements of this permit is subject to the Recordkeeping and Reporting requirements listed under Condition 22 of the General Conditions in Section IV of this permit. Either electronic or hard copy records are acceptable.

Operating Permit 09OPGA339 Issued: June 1, 2012

# 2. Alternative Operating Scenarios (ver 10/1/2011)

The following Alternative Operating Scenario (AOS) for the temporary and permanent replacement of natural gas fired reciprocating internal combustion engines has been reviewed in accordance with the requirements of Regulation No. 3., Part A, Section IV.A, Operational Flexibility-Alternative Operating Scenarios, Regulation No. 3, Part B, Construction Permits, and Regulation No. 3, Part D, Major Stationary Source New Source Review and Prevention of Significant Deterioration, and it has been found to meet all applicable substantive and procedural requirements. This permit incorporates and shall be considered a Construction Permit for any engine replacement performed in accordance with this AOS, and the permittee shall be allowed to perform such engine replacement without applying for a revision to this permit or obtaining a new Construction Permit.

## 2.1 Engine Replacement

The following AOS is incorporated into this permit in order to deal with a compressor engine breakdown or periodic routine maintenance and repair of an existing onsite engine that requires the use of either a temporary or permanent replacement engine. "Temporary" is defined as in the same service for 90 operating days or less in any 12 month period. "Permanent" is defined as in the same service for more than 90 operating days in any 12 month period. The 90 days is the total number of days that the engine is in operation. If the engine operates only part of a day, that day shall count as a single day towards the 90-day total. The compliance demonstrations and any periodic monitoring required by this AOS are in addition to any compliance demonstrations or periodic monitoring required by this permit.

All replacement engines are subject to all federally applicable and state-only requirements set forth in this permit (including monitoring and record keeping), and shall be subject to any shield afforded by this permit.

The results of all tests and the associated calculations required by this AOS shall be submitted to the Division within 30 calendar days of the test or within 60 days of the test if such testing is required to demonstrate compliance with NSPS or MACT requirements. Results of all tests shall be kept on site for five (5) years and made available to the Division upon request.

The permittee shall maintain a log on-site and contemporaneously record the start and stop date of any engine replacement, the manufacturer, date of manufacture, model number, horsepower, and serial number of the engine(s) that are replaced during the term of this permit, and the manufacturer, model number, horsepower, and serial number of the replacement engine. In addition to the log, the permittee shall maintain a copy of all Applicability Reports required under section 2.1.2 and make them available to the Division upon request.

2.1.1 The permittee may **temporarily** replace an existing compressor engine that is subject to the emission limits set forth in this permit with an engine that is of the same manufacturer, model, and horsepower or a different manufacturer, model, or horsepower as the existing engine without modifying this permit, so long as the temporary replacement engine complies with all permit limitations and other requirements

Issued: June 1, 2012

applicable to the existing engine. Measurement of emissions from the temporary replacement engine shall be made as set forth in section 2.2.

The permittee may temporarily replace a grandfathered or permit exempt engine or an engine that is not subject to emission limits without modifying this permit. In this circumstance, potential annual emissions of  $NO_x$  and CO from the temporary replacement engine must be less than or equal to the potential annual emissions of  $NO_x$  and CO from the original grandfathered or permit exempt engine or for the engine that is not subject to emission limits, as determined by applying appropriate emission factors (e.g. AP-42 or manufacturer's emission factors)

2.1.2 The permittee may **permanently** replace the existing compressor engine for the emission points specified in Table 1 with the manufacturer, model, and horsepower engines listed in Table 1 without modifying this permit so long as the permanent replacement engine complies with all permit limitations and other requirements applicable to the existing engine as well as any new applicable requirements for the replacement engine. Measurement of emissions from the permanent replacement engine and compliance with the applicable emission limitations shall be made as set forth in section 2.2.

An Air Pollutant Emissions Notice (APEN) that includes the specific manufacturer, model and serial number and horsepower of the permanent replacement engine shall be filed with the Division for the permanent replacement engine within 14 calendar days of commencing operation of the replacement engine. The APEN shall be accompanied by the appropriate APEN filing fee, a cover letter explaining that the permittee is exercising an alternative operating scenario and is installing a permanent replacement engine, and a copy of the relevant Applicability Reports for the replacement engine. Example Applicability Reports can be found in Appendix A. This submittal shall be accompanied by a certification from the Responsible Official indicating that "based on the information and belief formed after reasonable inquiry, the statements and information included in the submittal are true, accurate and complete".

This AOS cannot be used for permanent engine replacement of a grandfathered or permit exempt engine or an engine that is not subject to emission limits.

The permittee shall agree to pay fees based on the normal permit processing rate for review of information submitted to the Division in regard to any permanent engine replacement.

## 2.2 Portable Analyzer Testing

Note: In some cases there may be conflicting and/or duplicative testing requirements due to overlapping Applicable Requirements. In those instances, please contact the Division Field Services Unit to discuss streamlining the testing requirements.

Note that the testing required by this Condition may be used to satisfy the periodic testing requirements specified by the permit for the relevant time period (i.e. if the permit requires quarterly portable analyzer testing, this test conducted under the AOS will serve as the quarterly test and an additional portable analyzer test is not required for another three months).

The permittee may conduct a reference method test, in lieu of the portable analyzer test required by this Condition, if approved in advance by the Division.

The permittee shall measure nitrogen oxide  $(NO_X)$  and carbon monoxide (CO) emissions in the exhaust from the replacement engine using a portable flue gas analyzer within seven (7) calendar days of commencing operation of the replacement engine.

All portable analyzer testing required by this permit shall be conducted using the Division's Portable Analyzer Monitoring Protocol (ver March 2006 or newer).

Results of the portable analyzer tests shall be used to monitor the compliance status of this unit.

For comparison with an annual (tons/year) or short term (lbs/unit of time) emission limit, the results of the tests shall be converted to a lb/hr basis and multiplied by the allowable operating hours in the month or year (whichever applies) in order to monitor compliance. If a source is not limited in its hours of operation the test results will be multiplied by the maximum number of hours in the month or year (8760), whichever applies.

For comparison with a short-term limit that is either input based (lb/mmBtu), output based (g/hp-hr) or concentration based (ppmvd @ 15% O<sub>2</sub>) that the existing unit is currently subject to or the replacement engine will be subject to, the results of the test shall be converted to the appropriate units as described in the above-mentioned Portable Analyzer Monitoring Protocol document.

If the portable analyzer results indicate compliance with both the  $NO_X$  and CO emission limitations, in the absence of credible evidence to the contrary, the source may certify that the engine is in compliance with both the  $NO_X$  and CO emission limitations for the relevant time period.

Subject to the provisions of C.R.S. 25-7-123.1 and in the absence of credible evidence to the contrary, if the portable analyzer results fail to demonstrate compliance with either the  $NO_X$  or CO emission limitations, the engine will be considered to be out of compliance from the date of the portable analyzer test until a portable analyzer test indicates compliance with both the  $NO_X$  and CO emission limitations or until the engine is taken offline.

- 2.3 Applicable Regulations for Permanent Engine Replacements
  - 2.3.1 Reasonably Available Control Technology (RACT): Reg 3, Part B § II.D.2

All permanent replacement engines that are located in an area that is classified as attainment/maintenance or nonattainment must apply Reasonably Available

Operating Permit 09OPGA339 Issued: Jun

Control Technology (RACT) for the pollutants for which the area is attainment/maintenance or nonattainment. Note that both VOC and  $NO_X$  are precursors for ozone. RACT shall be applied for any level of emissions of the pollutant for which the area is in attainment/maintenance or nonattainment, except as follows:

In the Denver Metropolitan  $PM_{10}$  attainment/maintenance area, RACT applies to  $PM_{10}$  at any level of emissions and to  $NO_X$  and  $SO_2$ , as precursors to  $PM_{10}$ , if the potential to emit of  $NO_X$  or  $SO_2$  exceeds 40 tons/yr.

For purposes of this AOS, the following shall be considered RACT for natural-gas fired reciprocating internal combustion engines:

VOC: The emission limitations in NSPS JJJJ CO: The emission limitations in NSPS JJJJ NO<sub>X</sub>: The emission limitations in NSPS JJJJ

SO<sub>2</sub>: Use of natural gas as fuel PM<sub>10</sub>: Use of natural gas as fuel

As defined in 40 CFR Part 60 Subparts GG (§ 60.331) and 40 CFR Part 72 (§ 72.2), natural gas contains 20.0 grains or less of total sulfur per 100 standard cubic feet.

2.3.2 Control Requirements and Emission Standards: Regulation No. 7, Sections XVI. and XVII.E (State-Only conditions).

Control Requirements: Section XVI

Any permanent replacement engine located within the boundaries of an ozone nonattainment area is subject to the applicable control requirements specified in Regulation No. 7, section XVI, as specified below:

Rich burn engines with a manufacturer's design rate greater than 500 hp shall use a non-selective catalyst and air fuel controller to reduce emission.

Lean burn engines with a manufacturer's design rate greater than 500 hp shall use an oxidation catalyst to reduce emissions.

The above emission control equipment shall be appropriately sized for the engine and shall be operated and maintained according to manufacturer specifications.

The source shall submit copies of the relevant Applicability Reports required under Condition 2.1.2.

Emission Standards: Section XVII.E – State-only requirements

Any permanent engine that is either constructed or relocated to the state of Colorado from another state, after the date listed in the table below shall operate and maintain each engine according to the manufacturer's written instructions or procedures to the extent practicable and consistent with technological limitations and good engineering and maintenance practices over the entire life of the engine so that it achieves the emission standards required in the table below:

Issued: June 1, 2012

| Max Engine<br>HP  | Construction or Relocation Date | Emission Standards in G/hp-hr |     |     |  |
|---|---------------------------------|-------------------------------|-----|-----|--|
|   |                                 | $NO_X$                        | СО  | VOC |  |
| 100 <hp<500< td=""><td>January 1, 2008</td><td>2.0</td><td>4.0</td><td>1.0</td></hp<500<> | January 1, 2008                 | 2.0                           | 4.0 | 1.0 |  |
|   | January 1, 2011                 | 1.0                           | 2.0 | 0.7 |  |
| 500 <u>≤</u> Hp   | July 1, 2007                    | 2.0                           | 4.0 | 1.0 |  |
|   | July 1, 2010                    | 1.0                           | 2.0 | 0.7 |  |

The source shall submit copies of the relevant Applicability Reports required under Condition 2.1.2.

# 2.3.3 NSPS for stationary spark ignition internal combustion engines: 40 CFR Part 60, Subpart JJJJ

A permanent replacement engine that is manufactured on or after 7/1/09 for emergency engines greater than 25 hp, 7/1/2008 for engines less than 500 hp, 7/1/2007 for engines greater than or equal to 500 hp except for lean burn engines greater than or equal to 500 hp and less than 1,350 hp, and 1/1/2008 for lean burn engines greater than or equal to 500 hp and less than 1,350 hp are subject to the requirements of 40 CFR Part 60, Subpart JJJJ. An analysis of applicable monitoring, recordkeeping, and reporting requirements for the permanent engine replacement shall be included in the Applicability Reports required under Condition 2.1.2. Any testing required by the NSPS is in addition to that required by this AOS. Note that the initial test required by NSPS Subpart JJJJ can serve as the testing required by this AOS under Condition 2.2, if approved in advance by the Division, provided that such test is conducted within the time frame specified in Condition 2.2.

Note that under the provisions of Regulation No. 6. Part B, section I.B. that Relocation of a source from outside of the State of Colorado into the State of Colorado is considered to be a new source, subject to the requirements of Regulation No. 6 (i.e., the date that the source is first relocated to Colorado becomes equivalent to the manufacture date for purposes of determining the applicability of NSPS JJJJ requirements).

However, as of October 1, 2011 the Division has not yet adopted NSPS JJJJ. Until such time as it does, any engine subject to NSPS will be subject only under Federal law. Once the Division adopts NSPS JJJJ, there will be an additional step added to the determination of the NSPS. Under the provisions of Regulation No. 6, Part B, § I.B (which is referenced in Part A), any engine relocated from outside of the State of Colorado into the State of Colorado is considered to be a new source, subject to the requirements of NSPS JJJJ.

# 2.3.4 Reciprocating internal combustion engine (RICE) MACT: 40 CFR Part 63, Subpart ZZZZ

A permanent replacement engine located at either an area or major source is subject to the requirements in 40 CFR Part 63, Subpart ZZZZ. An analysis of the applicable

Issued: June 1, 2012

monitoring, recordkeeping, and reporting requirements for the permanent engine replacement shall be included in the Applicability Reports required under Condition 2.1.2. Any testing required by the MACT is in addition to that required by this AOS. Note that the initial test required by the MACT can serve as the testing required by this AOS under Condition 2.2, if approved in advance by the Division, provided that such test is conducted within the time frame specified in Condition 2.2.

#### 2.4 Additional Sources

The replacement of an existing engine with a new engine is viewed by the Division as the installation of a new emissions unit, not "routine replacement" of an existing unit. The AOS is therefore essentially an advanced construction permit review. The AOS cannot be used for additional new emission points for any site; an engine that is being installed as an entirely new emission point and not as part of an AOS-approved replacement of an existing onsite engine has to go through the appropriate Construction/Operating permitting process prior to installation.

Table 1

Internal Combustion Engine Information For AOS

| Emission<br>Point | Replacement Engine  | Periodic<br>Monitoring              | Subject to CAM?      |
|-------------------|---|-------------------------------------|----------------------|
| ENG01             | Caterpillar G3612 TALE, 4-Cycle Lean Burn,<br>Spark Ignition, Air-To-Fuel Ratio Controlled,<br>Natural Gas Fired Internal Combustion Engine,<br>3665 HP   | Portable<br>Monitoring<br>Quarterly | No                   |
| ENG02             | Caterpillar G3612 TALE, 4-Cycle Lean Burn,<br>Spark Ignition, Air-To-Fuel Ratio Controlled,<br>Natural Gas Fired Internal Combustion Engine,<br>3665 HP   | Portable<br>Monitoring<br>Quarterly | No                   |
| ENG03             | Caterpillar G3616 TALE, 4-Cycle Lean Burn,<br>Spark Ignition, Air-To-Fuel Ratio Controlled,<br>Natural Gas Fired Internal Combustion Engine,<br>4,890 HP  | Portable<br>Monitoring<br>Quarterly | Yes, upon<br>renewal |
| ENG04             | Caterpillar G3616 TALE, 4-Cycle Lean Burn,<br>Spark Ignition, Air-To-Fuel Ratio Controlled,<br>Natural Gas Fired Internal Combustion Engine,<br>4,890 HP  | Portable<br>Monitoring<br>Quarterly | Yes, upon<br>renewal |
| ENG05             | Caterpillar G3616 TALE, 4-Cycle Lean Burn,<br>Spark Ignition, Air-To-Fuel Ratio Controlled,<br>Natural Gas Fired Internal Combustion Engine,<br>4,890 HP  | Portable<br>Monitoring<br>Quarterly | Yes, upon<br>renewal |
| ENG06             | Caterpillar G3616 TALE, 4-Cycle Lean Burn,<br>Spark Ignition, Air-To-Fuel Ratio Controlled,<br>Natural Gas Fired Internal Combustion Engine,<br>4,890 HP  | Portable<br>Monitoring<br>Quarterly | Yes, upon<br>renewal |
| ENG07             | Caterpillar G3612 TALE, 4-Cycle Lean Burn, Spark Ignition, Air-To-Fuel Ratio Controlled, Natural Gas Fired Internal Combustion Engine, 3665 HP OR Caterpillar G3616 TALE, 4-Cycle Lean Burn, Spark Ignition, Air-To-Fuel Ratio Controlled, Natural Gas Fired Internal Combustion Engine, 4,890 HP | Portable<br>Monitoring<br>Quarterly | Yes, upon<br>renewal |

# 3. Prevention of Significant Deterioration

- 3.1 Based on the information provided by the applicant, this source is categorized as a minor stationary source for PSD as of the issue date of this permit. Any future modification which is major by itself (Potential to Emit of > 250 TPY) for any pollutant listed in Regulation No. 3, Part D, Section II.A.42 for which the area is in attainment or attainment/maintenance may result in the application of the PSD review requirements.
- 3.2 There are no other Operating Permits associated with this facility for purposes of determining applicability of Prevention of Significant Deterioration regulations.

## 4. Accidental Release Prevention Program (112(r))

4.1 Based on the information provided by the applicant, the facility is not subject to the provisions of the Accidental Release Prevention Program (section 112(r) of the Federal Clean Air Act).

# **5.** Compliance Assurance Monitoring (CAM)

5.1 The following emission points at this facility use a control device to achieve compliance with an emission limitation or standard to which they are subject and have pre-control emissions that exceed or are equivalent to the major source threshold. They are therefore subject to the provisions of the CAM program as set forth in 40 CFR Part 64, as adopted by reference in Colorado Regulation No. 3, Part C, Section XIV:

Uncontrolled emissions from each of the Caterpillar G3616 engines, each of the glycol dehydration units, and the condensate tank battery are above the major source level. The control devices on the engines and dehydrators are used to meet their emission limitations, therefore CAM applies to these units. However, since controlled emissions from the engines, dehydrators, and tank battery are below the major source level, CAM does not apply until the renewal of this permit (40 CFR Part 64 §64.5(b)).

Issued: June 1, 2012 Last Revised: November 29, 2012

# 6. Summary of Emission Units

6.1 The emissions units regulated by this permit are the following:

| Facility ID | AIRS<br>ID | Description  | Pollution Control     |
|-------------|------------|--|-----------------------|
| ENG01 - 02  | 001        | Two (2) Caterpillar G3612 TALE, 4-Cycle Lean Burn, Spark Ignition, Air-To-Fuel Ratio Controlled, Natural Gas Fired Internal Combustion Engine, 3,665 HP, SN: BKE00392, BKE00371  | Oxidation Catalyst    |
| ENG03 - 05  | 004        | Three (3) Caterpillar G3616 TALE, 4-Cycle Lean Burn, Spark Ignition, Air-To-Fuel Ratio Controlled, Natural Gas Fired Internal Combustion Engine, 4,890 HP, SN: BLB00391, BLB00503, BLB00502  | Oxidation Catalyst    |
| ENG06       | 012        | One (1) Caterpillar G3616 TALE, 4-Cycle Lean Burn, Spark Ignition, Air-To-Fuel Ratio Controlled, Natural Gas Fired Internal Combustion Engine, 4,890 HP, SN: BLB00522  | Oxidation Catalyst    |
| ENG07       | 013        | One (1) Caterpillar G3612 TALE, 4-Cycle Lean Burn, Spark Ignition, Air-To-Fuel Ratio Controlled, Natural Gas Fired Internal Combustion Engine, 3,665 HP OR One (1) Caterpillar G3616 TALE, 4-Cycle Lean Burn, Spark Ignition, Air-To-Fuel Ratio Controlled, Natural Gas Fired Internal Combustion Engine, 4,890 HP | Oxidation Catalyst    |
| TEG01       | 005        | One (1) Natco Triethylene Glycol Dehydrator, 40 MMscf/d, equipped with a flash tank, two electric glycol pumps rated at 7.5 gpm, and associated still vent   | Condenser, VRU, flare |
| TEG02       | 010        | One (1) J.W. Williams Triethylene Glycol Dehydrator, 40 MMscf/d, equipped with a flash tank, two electric glycol pumps rated at 7.5 gpm, and associated still vent. Skid SN: 24138   | Condenser, VRU, flare |
| TEG03       | 011        | One (1) Natco Triethylene Glycol Dehydrator, 40 MMscf/d, equipped with a flash tank, two electric glycol pumps rated at 7.5 gpm, and associated still vent   | Condenser, VRU, flare |
| TEG04       | 014        | One (1) Triethylene Glycol Dehydrator, 40 MMscf/d, equipped with a flash tank, two electric glycol pumps rated at 7.5 gpm, and associated still vent   | Condenser, VRU, flare |
| TNK01 - 07  | 006        | Condensate Tank Battery, consisting of seven (7) storage tanks, 400 barrel capacity each   | VRU, flare            |
| FUG         | 007        | Fugitive VOC from Equipment Leaks  | None                  |
| FLARE       | 008        | One (1) Leeds Model 36 S Flare, SN: 10996  | N/A                   |
| LOADING     | 009        | Tank Truck Loadout   | None                  |

# **SECTION II - Specific Permit Terms**

1. ENG01 - 02: Two (2) Caterpillar G3612 Compressor Engines, Rated at 3665 HP Each ENG03 - 06: Four (4) Caterpillar G3616 Compressor Engines, Rated at 4890 HP Each ENG07: One (4) Caterpillar G3612 or G3616 Compressor Engine, Rated at 3665 HP or 4890 HP

Note: These limitations apply to **each engine** 

| Parameter                      | Permit Condition | Limitations   |  | Emission Factor                                 | Monitoring   |  |
|--------------------------------|------------------|---|--|---|--|--|
| Farameter                      | Number           | Short-Term  | Long-Term  | (lb/MMBtu)                                      | Method   | Interval   |
| NO <sub>X</sub>                | 1.1              | <b>ENG07:</b> 2.81 tons/mo  | <b>ENG01-02:</b> 24.8 TPY <b>ENG03-07:</b> 33.1 TPY  | ENG01-02: 0.2286<br>ENG03-07: 0.2291            | Recordkeeping & Calculation                        | Monthly  |
| СО                             |                  | <b>ENG07:</b> 1.00 tons/mo  | <b>ENG01-02:</b> 8.9 TPY <b>ENG03-07:</b> 11.8 TPY   | ENG01-02: 0.0820<br>ENG03-07: 0.0818            | 12 month rolling                                   |  |
| VOC                            | 1.2              | <b>ENG07:</b> 1.95 tons/mo  | <b>ENG01-02:</b> 17.3 TPY <b>ENG03-07:</b> 22.9 TPY  | <b>ENG01-02:</b> 0.1600 <b>ENG03-07:</b> 0.1587 |  |  |
| Natural Gas<br>Consumption     | 1.3              | ENG07: 23.1<br>MMscf/mo   | ENG01-02: 204.7<br>MMscf/yr<br>ENG03-07: 272.5<br>MMscf/yr   |   |  |  |
| Btu Content of<br>Natural Gas  | 1.4              |   |  |   | ASTM, EPA or<br>other Division<br>Approved Methods | Annually   |
| Opacity                        | 1.5              | Not to Exceed 20% Except as Provided for Below  For Startup – Not to Exceed 30%, for a Period or Periods Aggregating More than Six (6) Minutes in any 60  Consecutive Minutes |  |   | Fuel Restriction                                   | Only Natural<br>Gas is Used a                      |
|                                |                  |   |  |   |  | Fuel   |
| Stack Height                   | 1.6              |   | ≥ 57 feet  |   | One tir  | ne   |
| NSPS Subpart JJJJ              | 1.7              | NOx - 2.0 g<br>CO - 4.0 g   | For each engine except ENG02:<br>NOx - 2.0 g/hp-hr or 160 ppmvd*<br>CO - 4.0 g/hp-hr or 540 ppmvd*<br>VOC - 1.0 g/hp-hr or 86 ppmvd* |   | Performance Tests                                  | Every 8,760<br>hours of<br>operation or 3<br>years |
| MACT Subpart<br>ZZZZ           | 1.8              | Limit formaldehyde concentrations to 14 ppmvd @ 15% O <sub>2</sub> or Reduce CO by 93%  |  |   | Performance Tests                                  | Semiannually                                       |
| NSPS Subpart A                 | 1.9              |   |  |   | See Conditi  | ion 1.9  |
| MACT Subpart A                 | 1.10             |   |  |   | See Condition                                      | on 1.10  |
| [State-Only]<br>Control Device | 1.11             | ENG02 only: See Condition 1.11  |  |   | See Condition                                      | on 1.11  |
| Construction<br>Requirements   | 1.12             | ENG07 on  | ly: See Condition 1.12   |   | See Condition                                      | on 1.12  |

<sup>\*</sup> Concentrations at 15% O<sub>2</sub>

Issued: June 1, 2012

- 1.1 Emissions of Nitrogen Oxides (NO<sub>X</sub>) and Carbon Monoxide (CO) from **each engine** shall not exceed the limitations stated above (Colorado Construction Permit 07GA0569, as modified under the provisions of Section I, Condition 1.3). The short term limits for ENG07 only apply for the first twelve months of operation. Compliance with the emission limitations shall be monitored as follows:
  - 1.1.1 Except as provided below, the emission factors listed above have been approved by the Division and shall be used to calculate emissions from these engines.

Monthly emissions shall be calculated by the end of the subsequent month using the above emission factor, the natural gas consumption (as required by Condition 1.3) and the Btu content of the natural gas (as required by Condition 1.4) in the equation below

tons/mo = [EF (lb/MMBtu) x fuel use (MMscf/mo) x heat content of fuel (MMBtu/MMscf)]2000 lb/ton

Monthly emissions shall be used in a twelve month rolling total to monitor compliance with the annual limitations. Each month a new twelve month total shall be calculated using the previous twelve months data.

If the results of the portable analyzer testing conducted under the provisions of Condition 1.1.2 show that either the  $NO_X$  or CO emission rates/factors are greater than the emission rates/factors listed above, and in the absence of subsequent testing results to the contrary (as approved by the Division), the permittee shall apply for a modification to this permit to reflect, at a minimum, the higher emission rates/factors within 60 days of the completion of the test.

- 1.1.2 Portable monitoring shall be conducted quarterly as required by Condition 8.
- 1.2 Volatile Organic Compounds (VOC) emissions from **each engine** shall not exceed the annual emission limitation stated above (Colorado Construction Permit 07GA0569, as modified under the provisions of Section I, Condition 1.3). The short term limits for ENG07 only apply for the first twelve months of operation. Monthly emissions shall be calculated by the end of the subsequent month using the above emission factor the monthly natural gas consumption (as required by Condition 1.3) and the Btu content of the natural gas (as required by Condition 1.4) in the equation below:

tons/mo = [EF (lb/MMBtu) x fuel use (MMscf/mo) x heat content of fuel (MMBtu/MMscf)]2000 lb/ton

Monthly emissions shall be used in a twelve month rolling total to monitor compliance with the annual limitations. Each month a new twelve month total shall be calculated using the previous twelve months data.

1.3 Natural gas consumption from **each engine** shall not exceed the above limitation (Colorado Construction Permit 07GA0569, as modified under the provisions of Section I, Condition 1.3). The short term limits for ENG07 only apply for the first twelve months of operation. On the first

Issued: June 1, 2012

working day of each month, facility-wide natural gas consumption shall be recorded using the existing fuel meter. The natural gas use shall be measured no more than one (1) hour from the time that run time hours have been recorded. Allocation of natural gas to each engine will be calculated using the following calculation:

Fuel Consumption = 
$$\frac{\text{(Design Heat Rate} \times \text{Hours of Operation)}_{\text{individual engine}}}{\sum \text{(Design Heat Rate} \times \text{Hours of Operation)}_{\text{each engine}}} \times \text{Total Engine Fuel Use}$$

Records of calculations shall be kept in a log to be made available to the Division upon request. Monthly natural gas consumption from **each engine** shall be used in a twelve month rolling total to monitor compliance with the annual limitation. Each month, a new twelve month total shall be calculated using the previous twelve months data.

- 1.4 The Btu content of the natural gas used to fuel these engines shall be verified annually using the appropriate ASTM Methods or equivalent, if approved in advance by the Division. The Btu content of the natural gas shall be based on the lower heating value of the fuel. Calculation of monthly emissions shall be made using the heat content derived from the most recent required analysis.
- 1.5 Visible emissions shall not exceed 20% opacity (Colorado Construction Permit 07GA0569 and Colorado Regulation No. 1, Section II.A.1) except during periods of startup when visible emissions shall not exceed 30% opacity for a period or periods aggregating more than six (6) minutes in any sixty (60) consecutive minutes (Colorado Regulation No. 1, Section II.A.4). This opacity standard applies to **each engine.** In the absence of credible evidence to the contrary, compliance with the opacity limit shall be presumed since only natural gas is permitted to be used as fuel for these engines.
- 1.6 The stack height on **each** of these units shall be at least 57 feet above ground level. (Colorado Construction Permit 07GA0569)
- 1.7 **[Federal-Only]** These engines, **except ENG02**, are subject to the requirements in 40 CFR Part 60 Subpart JJJJ, "Standards of Performance for Stationary Spark Ignition Internal Combustion Engines", including but not limited to the following requirements:

Note that as of the date of revised permit issuance [June 1, 2012], the requirements in 40 CFR Part 60 Subpart JJJJ have not been adopted into Colorado Regulation No. 6, Part A by the Division and are therefore not state-enforceable. In the event that the Division adopts these requirements, these requirements will become both state and federally enforceable.

1.7.1 These engines must comply with the specific emission limitations shown in the table below: (Table 1 of Subpart JJJJ)

| Engine Type and Fuel: Non-Emergency SI Natural Gas and Non-Emergency SI Lean Burn LPG |  |                   |                              |     |     |  |
|---|--|-------------------|------------------------------|-----|-----|--|
|   |  | (except lean burn | $500 \ge hp < 1,350$         | )   |     |  |
|   |  | Maximum Engine    | Power: $\geq 500 \text{ hp}$ | )   |     |  |
|   | Manufacturer Date: July 1, 2007  |                   |                              |     |     |  |
| Emiss   | Emission Standards (g/hp-hr) Emission Standards (ppmvd at 15% O <sub>2</sub> ) |                   |                              |     |     |  |
| $NO_X$  | NO <sub>X</sub> CO VOC   |                   |                              | CO  | VOC |  |
| 2.0   | 4.0  | 1.0               | 160                          | 540 | 86  |  |

1.7.1.1 For engines manufactured prior to January 1, 2011 that were certified to the certification emission standards in 40 CFR part 1048 applicable to engines that are not severe duty engines, if such stationary SI ICE was certified to a carbon monoxide (CO) standard above the standard in Condition 1.7.1 above, then the source may meet the CO certification (not field testing) standard for which the engine was certified. (§ 60.4233(e))

# **Compliance Requirements**

1.7.2 This facility shall keep a maintenance plan and records of conducted maintenance and, to the extent practicable, maintain and operate the engine in a manner consistent with good air pollution control practice for minimizing emissions. In addition, this facility shall conduct an initial performance test and conduct subsequent performance testing every 8,760 hours or 3 years, whichever comes first, thereafter to demonstrate compliance. (§ 60.4243(b)(2)(ii))

# Notification, Reporting, and Recordkeeping Requirements

- 1.7.3 The facility must keep records of the following information:
  - 1.7.3.1 All notifications submitted to comply with this subpart and all documentation supporting any notification. (§ 60.4245(a)(1))
  - 1.7.3.2 Maintenance conducted on the engine. (§ 60.4245(a)(2))
  - 1.7.3.3 If the engine is not a certified engine or is a certified engine operating in a non-certified manner and subject to §60.4243(a)(2), documentation that the engine meets the emission standards. (§ 60.4245(a)(4))
- 1.7.4 Engines that not been certified by an engine manufacturer to meet the emission standards in §60.4231 must submit an initial notification as required in §60.7(a)(1). The notification must include the information in paragraphs (c)(1) through (5) of this section. (§ 60.4245(c))
- 1.7.5 The source must submit a copy of each performance test as conducted in §60.4244 within 60 days after the test has been completed. (§ 60.4245(d))
- 1.8 These engine are subject to the requirements in 40 CFR Part 63 Subpart ZZZZ, "National Emission Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines", as follows: (Colorado Regulation No. 8, Part E, Subpart III.FFFF)

Issued: June 1, 2012 Last Revised: November 29, 2012

- 1.8.1 Engines ENG01-05 must comply with the applicable limitations no later than January 13, 2014. Engines ENG06 and 07 must comply with the applicable limitations upon startup (§63.6595(a)(1))
- 1.8.2 The engines shall meet either of the following emissions limitations at all times except during startup:
  - 1.8.2.1 Carbon Monoxide (CO) shall be reduced by 93 percent or more (Table 2a of Subpart ZZZZ, Item 2.a), **or**
  - 1.8.2.2 Formaldehyde emission shall be limited to 14 ppmvd at 15% O<sub>2</sub> (Table 2a of Subpart ZZZZ, Item 2.b).
- 1.8.3 For each oxidizing catalytic reduction device installed to meet the emissions limitations in Condition 1.8.2, the following operating requirements shall apply (Table 2b of Subpart ZZZZ, Item 1):
  - 1.8.3.1 Maintain the catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water at 100 percent load plus or minus 10 percent from the pressure drop across the catalyst measured during the initial performance test and
  - 1.8.3.2 Maintain the temperature of the engine's exhaust so the catalyst inlet temperature is greater than or equal to 450°F and less than or equal to 1350°F.

#### **Performance Tests**

- 1.8.4 Initial performance tests must be conducted within 180 days after the compliance date specified in Condition 1.8.1 according to the provisions of §63.7(a)(2). (§63.6610(a))
  - 1.8.4.1 An initial performance test is not required on a unit which a performance test has previously been conducted, provided the test meets the conditions described in §63.6610(d)(1) through (4). (§63.6610(d))
  - 1.8.4.2 Catalyst pressure drop and catalyst inlet temperature shall be recorded during the initial performance test.
- 1.8.5 Performance tests must be conducted using the appropriate ASTM methods or equivalent, if approved in advance by the Division, as described in Table 4 to Subpart ZZZZ, according to the following protocol:

If complying with the requirement to reduce CO emissions: (Table 4, Item 1)

- 1.8.5.1 Measure  $O_2$  at the inlet and outlet of the control device using a portable CO and  $O_2$  analyzer.
  - a. Measurements to determine  $O_2$  concentration must be made at the same time as the measurements for CO concentration.
- 1.8.5.2 Measure CO at the inlet and the outlet of the control device using a portable CO

Issued: June 1, 2012

and O<sub>2</sub> analyzer.

a. CO concentration must be at 15 percent  $O_2$ , dry basis.

If complying with the requirement to limit formaldehyde concentration: (Table 4, Item 3)

- 1.8.5.3 Select the sampling port location and the number of traverse points and measure the O<sub>2</sub> concentration, moisture content, and formaldehyde concentration.
  - a. The sampling site must be located at the outlet of the control device.
  - b. Measurements to determine  $O_2$  concentration and moisture content must be made at the same time and location as the measurements for the formaldehyde concentration.
  - c. Formaldehyde concentration must be at 15 percent  $O_2$ , dry basis. Results of this test consist of the average of three 1-hour or longer runs.

# **Demonstrating Compliance**

- 1.8.6 Initial compliance with the requirement to limit formaldehyde concentration **or** reduce CO emissions in Condition 1.8.2 is demonstrated by achieving the following:
  - 1.8.6.1 The average reduction of emissions of CO determined from the initial performance test achieves the required CO percent reduction **or** the average formaldehyde concentration, corrected to 15% O<sub>2</sub>, dry basis, from the three test runs is less than or equal to formaldehyde emission limitation (Table 5 of Subpart ZZZZ, Item 1.a.i or 10.a.i) and
  - 1.8.6.2 A CPMS has been installed to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b); (Table 5 of Subpart ZZZZ, Item 1.a.ii or 10.a.ii) and
  - 1.8.6.3 The catalyst pressure drop and catalyst inlet temperature have been recorded during the initial performance test. (Table 5 of Subpart ZZZZ, Item 1.a.iii or 10.a.iii)
- 1.8.7 Demonstrate continuous compliance with the limitations in Condition 1.8.2 using the following methods described in Table 6 of Subpart ZZZZ. (§63.6640(a)):
  - 1.8.7.1 Conduct performance tests according to Condition 1.8.5 semiannually to demonstrate that the required CO percent reduction **or** required formaldehyde concentration is met; (Table 6 of Subpart ZZZZ, Item 1.a.i or 8.a.i) and
  - 1.8.7.2 Collect the catalyst inlet temperature data according to §63.6625(b); (Table 6 of Subpart ZZZZ, Item 1.a.ii or 8.a.ii) and
  - 1.8.7.3 Reduce these data to 4-hour rolling averages; (Table 6 of Subpart ZZZZ, Item 1.a.iii or 8.a.iii) and
  - 1.8.7.4 Maintain the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; (Table 6 of Subpart ZZZZ, Item 1.a.iv or 8.a.iv) and

Issued: June 1, 2012 Last Revised: November 29, 2012

- 1.8.7.5 Measure the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test. (Table 6 of Subpart ZZZZ, Item 1.a.v or 8.a.v)
- 1.8.7.6 After the facility has demonstrated compliance for two consecutive tests, the frequency of subsequent performance tests may be reduced to annually. If the results of any subsequent annual performance test indicate the stationary RICE is not in compliance with the CO or formaldehyde emission limitation semiannual performance tests must resume. (Table 6 of Subpart ZZZZ, footnote a)

# Notification and Reporting Requirements

- 1.8.8 Submit compliance reports semiannually according to the requirements in §63.6650(b). The report must contain the following:
  - 1.8.8.1 If there are no deviations from any emission limitations or operating limitations, include a statement that there were no deviations from the emission limitations or operating limitations during the reporting period. If there were no periods during which the continuous monitoring system was out-of-control, as specified in §63.8(c)(7), include a statement that there were not periods during which the CMS was out-of-control during the reporting period. (Table 7 of Subpart ZZZZ, Item 1.a)
  - 1.8.8.2 If there is a deviation from any emission limitation or operating limitation during the reporting period, include the information in §63.6650(d). If there were periods during which the continuous monitoring system was out-of-control, as specified in §63.8(c)(7), include the information in §63.6650(e). (Table 7 of Subpart ZZZZ, Item 1.b)
  - 1.8.8.3 If there was a malfunction during the reporting period, include the information in §63.6650(c)(4). (Table 7, Item 1.c)
- 1.8.9 Submit a Notification of Compliance Status according to §63.6645(h).
- 1.8.10 Submit all notifications that are applicable in §§63.7(b) and (c), 63.8(e), (f)(4) and (f)(6), 63.9(b) through (e), (g) and (h). (§63.6645(a))
- 1.8.11 Keep records of the maintenance conducted on the engine in order to demonstrate that the engine was operated and maintained according to the maintenance plan. (§66.6655(e)).

## General Requirements

- 1.8.12 Compliance with the emission limitations and operating limitations in this subpart must be achieved at all times. (§63.6605(a))
- 1.8.13 At all times the engine must be operated and maintained in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require any further efforts to reduce emissions if

Operating Permit 09OPGA339

levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Division which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source. (§63.6605(b))

- 1.8.14 Comply with the monitoring, installation, collection, and maintenance requirements in §63.6625.
- 1.8.15 Minimize the engine's time spent at idle during startup and minimize the engine's startup time to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes. (§63.6625(h))
- 1.9 **[Federal-Only]** These engines, **except ENG02**, are subject to the requirements in 40 CFR Part 60 Subpart A "General Provisions". These requirements include, but are not limited to the following
  - 1.9.1 No article, machine, equipment or process shall be used to conceal an emission which would otherwise constitute a violation of an applicable standard. Such concealment includes, but is not limited to, the use of gaseous diluents to achieve compliance with an opacity standard or with a standard which is based on the concentration of a pollutant in the gasses discharged to the atmosphere. (40 CFR 60 Subpart A § 60.12, as adopted by reference in Colorado Regulation No. 6, Part A).
  - 1.9.2 Performance tests shall be conducted in accordance with the requirements in 40 CFR Part 60 Subpart A § 60.8.
- 1.10 These engine are subject to the requirements in 40 CFR Part 63 Subpart A "General Provisions", as adopted by reference in Colorado Regulation No. 8, Part E, Section I as specified in 40 CFR Part 63 Subpart ZZZZ § 63.6665. These requirements include, but are not limited to the following
  - 1.10.1 Prohibited activities and circumvention in § 63.4.
  - 1.10.2 Performance testing in §63.7.
  - 1.10.3 Monitoring in §63.8.
  - 1.10.4 Notification in §63.9.
  - 1.10.5 Recordkeeping and reporting in §63.10.

Issued: June 1, 2012

1.11 **[State-Only] ENG02 only:** Emissions from this engine shall not exceed the following emission performance standards: (Colorado Regulation No. 7, Section XVII.E.2.b)

| Pollutant           | $NO_X$ | VOC | СО  |
|---------------------|--------|-----|-----|
| Emissions (g/hp-hr) | 2.0    | 1.0 | 4.0 |

Parameters associated with the oxidation catalyst installed to meet the emission standards required by this Condition 1.11 shall be monitored as follows:

- 1.11.1 The pressure drop across the catalyst shall be monitored and recorded monthly.
- 1.11.2 The catalyst inlet temperature shall be monitored and recorded daily and kept between 450°F and 1350°F.

When portable monitoring is scheduled, the above parameters shall be recorded during the portable monitoring event.

- 1.11.3 The oxygen concentration in the engine exhaust gas shall be measured and recorded during each portable monitoring event required by Condition 1.1.2.
- 1.11.4 The oxidation catalyst shall be operated and maintained pursuant to manufacturer specifications or equivalent to the extent practicable, and consistent with technological limitations and good engineering and maintenance practices. Manufacturer specifications or equivalent shall be kept on file.

Upon compliance with the requirements of Condition 1.8, the emissions limitations and monitoring requirements in this condition shall no longer apply.

- 1.12 **ENG07 only:** The following requirements apply to the construction of ENG07:
  - 1.12.1 The source must submit a Notice of Startup (NOS) form to the Division by no later than thirty (30) days after the commencement of the operation of this engine. The NOS form may be downloaded online at <a href="https://www.cdphe.state.co.us/ap/downloadforms.html">www.cdphe.state.co.us/ap/downloadforms.html</a>. (Colorado Regulation No. 3, Part B, Section III.G.1). The NOS form shall include model and serial number of the engine installed.
  - 1.12.2 Within thirty (30) days after commencement of operation of this engine the source shall submit to the Division a complete Air Pollution Emissions Notice (APEN) requesting to modify this permit to reflect the actual equipment constructed and remove provisions for the engine option not installed. (Colorado Construction Permit 07GA0569)
  - 1.12.3 The permit to construct this engine shall expire if the facility does not commence construction by November 10, 2012. The Division may grant extensions of the deadline per Colorado Regulation No. 3, Part B, III.F.4.b. (Colorado Regulation No. 3, Part B, Section III.F.4.)

Issued: June 1, 2012

1.12.4 An initial performance tests shall be conducted within 180 days of the commencement of operation of this engine, to demonstrate compliance with the NO<sub>X</sub>, CO and formaldehyde emission limitations. The performance test shall be conducted using the appropriate EPA Test Methods.

A stack testing protocol shall be submitted for Division approval at least thirty (30) calendar days prior to performance of the test required under this condition. No stack test required herein shall be performed without prior written approval of the protocol by the Division. The Division reserves the right to witness the test. In order to facilitate the Division's ability to make plans to witness the test, notice of the date (s) for the stack test shall be submitted to the Division at least thirty (30) calendar days prior to the test. The Division may for good cause shown, waive this thirty (30) day notice requirement. In instances when a scheduling conflict is presented, the Division shall immediately contact the permittee in order to explore the possibility of making modifications to the stack test schedule. The required number of copies of the compliance test results shall be submitted to the Division within sixty (60) calendar days of the completion of the test unless a longer period is approved by the Division.

Issued: June 1, 2012 Last Revised: November 29, 2012

# 2. TEG01 - 04: Four (4) TEG Dehydrators, Rated at 40 MMscf/d Each

Note: These limitations apply to **each** glycol dehydrator.

| Parameter                                | Permit<br>Condition | Limitation                   |                    | Limitation            |  | Compliance           | Moni | toring |
|--|---------------------|------------------------------|--------------------|-----------------------|--|----------------------|------|--------|
| Parameter                                | Number              | Short-Term                   | Long-Term          | Emission Factor       | Method                                       | Interval             |      |        |
| VOC                                      | 2.1                 | <b>TEG04:</b> 0.38 lbs/mo    | 4.4 TPY            | GLYCalc 4.0 or higher | Parametric<br>12 month rolling               | Daily and<br>Monthly |      |        |
| Natural Gas<br>Processed -<br>Throughput | 2.2                 | <b>TEG04:</b> 1,240 MMscf/mo | 14,600<br>MMscf/yr |                       | Recordkeeping & Calculation 12 month rolling | Monthly              |      |        |
| Lean Glycol Pumping<br>Rate              | 2.3                 | 7.5 gallor                   | ns per min         |                       | Recordkeeping                                | Weekly               |      |        |
| Extended Gas<br>Analysis                 | 2.4                 |                              |                    |                       | EPA Reference<br>Methods                     | Annually             |      |        |
| Days/Hours of<br>Operation               | 2.5                 |                              |                    |                       | Recordkeeping                                | See Condition 2.5    |      |        |
| [State-Only] Control<br>System           | 2.6                 | 90% Reduct                   | tion of VOC        |                       | See Con                                      | dition 2.6           |      |        |
| MACT Subpart HH                          | 2.7                 |                              |                    |                       | See Con                                      | dition 2.7           |      |        |

2.1 VOC emissions from each dehydrator shall not exceed the annual emission limitation stated above (Colorado Construction Permit 07GA0569, as modified under the provisions of Section I, Condition 1.3). The short term limits for TEG04 only apply for the first twelve months of operation. Emissions of VOC will be calculated monthly using the Gas Research Institute's GLYCalc (Version 4.0 or higher) Model. Parametric monitoring of the triethylene glycol circulation rate, condenser outlet temperature, inlet gas pressure and temperature, reboiler temperature and pressure, and flash tank temperature and pressure will be performed to verify input to this model. Values recorded shall be representative of how the unit operated during the period. Recording interval for all parameters, except the condenser outlet temperature and lean glycol circulation rate, will be on a monthly basis. The condenser outlet temperature and lean glycol circulation rate shall be recorded manually or automatically on a weekly basis and a monthly average of these readings shall be used in GLYCalc. Monthly calculation of emissions using GLYCalc will be conducted by the end of the subsequent month utilizing the gas data from the last analysis conducted as required by Condition 2.3 and the average value of the monitored parameters.

Monthly VOC emissions shall be used in a twelve month rolling total to monitor compliance with the annual limitations. Each month a new twelve month total shall be calculated using the previous twelve months data

2.2 The gas processed by the glycol dehydration unit shall not exceed the limitations listed above (Construction Permit 07GA0569, as modified under the provisions of Section I, Condition 1.3).

Issued: June 1, 2012

The short term limits for TEG04 only apply for the first twelve months of operation. The gas throughput to the dehydration unit shall be calculated daily according to following equation:

$$Dehy \ Throughput = \frac{Hours \ of \ Operation_{individual \ dehy}}{\sum Hours \ of \ Operation_{each \ dehy}} \times Total \ Throughput_{Facility \ Sales \ Meter + \ Fuel \ Meter}$$

Records of calculations shall be kept in a log to be made available to the Division upon request. The daily gas throughput rate shall be used in the monthly GLYCalc runs required by Condition 2.1. A twelve month rolling total will be maintained to monitor compliance with annual limitations.

- 2.3 The maximum pumping rate of lean glycol for **each dehy** shall not exceed 7.5 gallons per minute (Colorado Construction Permit 07GA0569). The lean glycol recirculation rate shall be recorded weekly in a log maintained on site and made available to the Division for inspection upon request.
- Samples of inlet gas shall be collected and analyzed (extended gas analysis) annually to determine C<sub>1</sub> to C<sub>6</sub>, n-hexane, benzene, toluene, ethyl benzene and total xylene (BTEX) composition. If any of the analyses indicates the BTEX constituent concentrations exceed the values listed in the table below, frequency of extended gas analyses will revert to quarterly. The first quarterly sample shall be taken three months after the sample that indicated a BTEX constituent exceeded the parameters in the table was taken. Frequency of sampling and analysis will move to semi-annually after four (4) subsequent analyses and to annually after two (2) subsequent semi-annual analyses indicate that the BTEX constituents remain at or below the values in the table below.

| Constituent   | Value | Units             | Criteria    |
|---------------|-------|-------------------|-------------|
| Benzene       | 161   | parts per million | At or Below |
| Toluene       | 270   | parts per million | At or Below |
| Ethyl Benzene | 20    | parts per million | At or Below |
| Xylene        | 210   | parts per million | At or Below |

- 2.5 Days and hours of operation shall be monitored and recorded monthly in a log that is to be made available to the Division upon request. Days of operation shall be used to calculate an average daily gas throughput as specified in Condition 2.2. Hours of operation for the month shall be used in the GLYCalc runs required by Condition 2.1.
- 2.6 **[State-only]** This emissions unit is designed with a control system, which shall be capable of reducing the emissions of volatile organic compounds by at least 90% (Colorado Regulation No. 7, Section XVII.D).

The VRU/flare shall be operated at all times when gases, vapors and fumes are vented through the closed-vent system. Flash tank vapors shall be routed to the rebuilder burner for control. If fuel is not needed by the reboiler, flash tank vapors shall be routed to the condensate tanks. The

Issued: June 1, 2012

- total facility run time and VRU and flare operating time shall be monitored and recorded. (Construction Permit 07GA0569, as modified under the provisions of Section I, Condition 1.3).
- 2.7 The glycol dehydration units are subject to the requirements in 40 CFR Part 63 Subpart HH, "National Emission Standards for Hazardous Air Pollutants From Oil and Natural Gas Production Facilities", as adopted by reference in Colorado Regulation No. 8, Part E, Section III, including, but not limited to the following:
  - These dehydrators are exempt from all requirements, save recordkeeping in §63.774(d)(1), provided the criterion in Condition 2.7.1.1 below is met: (§63.764(e)(1))
    - 2.7.1.1 The actual average emissions of benzene from the glycol dehydration unit process vent to the atmosphere shall be less than 0.90 megagram per year, or 1984 lb per year, as determined by the procedures specified in Condition 2.7.3 (§63.764 (e)(1)(ii)).
  - Records shall be kept of the actual average benzene emissions (in terms of benzene emissions per year) as determined in accordance with Condition 2.7.3 §63.772(b)(2) (§63.774(d)(1)(ii)).
  - The determination of actual average benzene emissions from this glycol dehydration unit 2.7.3 shall be made using the procedure described in Condition 2.7.3.1 below. Emissions shall be determined with federally enforceable controls in place.
    - 2.7.3.1 The actual average benzene emissions shall be determined using the model GRI-GLYCalc, Version 3.0 or higher, and the procedures presented in the associated GRI-GLYCalc, Technical Reference Manual. Inputs to the model shall be representative of actual operating conditions of the glycol dehydration unit and may be determined using the procedures documented in the Gas Research Institute (GRI) report entitled "Atmospheric Rich/Lean Method for Determining Glycol Dehydrator Emissions" (GRI-95/0368.1) (Colorado Construction Permit 07GA0569 and §63.772(b)(2)(i)).

Issued: June 1, 2012

# 3. TNK01 - 07: Condensate Tank Battery, Seven (7) Storage Tanks, 400 bbl Capacity Each

Note: These limitations apply to the tank battery as a unit rather than to the individual tanks. At the time of issuance of this

permit, only five of the six permitted tanks were installed.

| Parameter                          | Permit<br>Condition<br>Number | Limitation        | Compliance Emission<br>Factor | Monitoring                                  |                   |
|------------------------------------|-------------------------------|-------------------|-------------------------------|---|-------------------|
|                                    |                               |                   |                               | Method                                      | Interval          |
| VOC                                | 3.1                           | 10.6 TPY          | E&P TANKS                     | Recordkeeping<br>12 month rolling           | Monthly           |
| E&P Tanks Input<br>Parameters      | 3.2                           |                   |                               | Recordkeeping,<br>Sampling, and<br>Analysis | See Condition 3.2 |
| Condensate<br>Throughput           | 3.3                           | 43,800 bbl/yr     |                               | Recordkeeping                               | Monthly           |
| [State-Only]<br>Emission Reduction | 3.4                           | 95% VOC control   |                               | See Condition 3.4                           |                   |
| Control system monitoring          | 3.5                           | See Condition 4.5 |                               | See Condition 3.5                           |                   |

- VOC emissions from the tank battery shall not exceed the limitations above (Construction Permit 07GA0569, as modified under the provisions of Section I, Condition 1.3). Compliance with the annual limit shall be monitored on a rolling 12-month total. By the end of each month a new twelve month total is calculated based on the previous twelve months data. Monthly emissions of VOC shall be calculated using API's E&P Tanks Version 2.0 or higher. Emissions for each month shall be calculated using the input parameters and the sales oil properties specified in Condition 3.2, the monthly quantity of condensate sold as determined by Condition 3.3. Records of the actual emissions shall be maintained and made available to the Division for inspection upon request.
- 3.2 The input parameters to E&P Tanks shall be monitored as follows:
  - 3.2.1 Monthly averages of the following monitored values shall be determined for use as inputs to the Tanks model. Monthly average values shall be representative of the unit's operation during the month. The recorded values for slug catcher temperature and pressure shall be used to calculate emissions as required by Condition 3.1.

| Parameter                | Monitoring Frequency |
|--------------------------|----------------------|
| Slug Catcher Temperature | Weekly               |
| Slug Catcher Pressure    | Weekly               |

3.2.2 For purposes of calculating emissions as required by Condition 3.1, the permittee shall use the historical monthly mean temperature recorded at the Garfield County Regional Airport (RIL). The appropriate atmospheric pressure based on the unit's elevation shall

Issued: June 1, 2012

- be used. Upon request, the Division may accept alternative temperature data provided the data is representative of actual conditions and is from a reputable source.
- 3.2.3 The permittee shall sample and analyze liquids annually for the compositional E&P Tanks input requirements. The 'low pressure oil' condensate sample must be collected and analyzed per Division approved methods as specified in Permit Section Memo 05-01 (http://www.cdphe.state.co.us/ap/down/ps05-01.pdf). The stream shall be sampled at the outlet of the separator, prior to flashing, or at another appropriate location if approved by the Division. Sampling must occur when the systems are operating such that any xylene and/or methanol injections that occur upstream of the facility are captured by the sampling. A copy of the procedures used to obtain and analyze the samples as well as records of the analyses shall be maintained and made available to the Division upon request.
- 3.2.4 The average monthly RVP from loadout sampling shall be used to calculated an API Gravity and shall be used to calculate emissions as required by Condition 3.1.
- The quantity of condensate processed through the tank battery shall not exceed the above limit (Construction Permit 07GA0569, as modified under the provisions of Section I, Condition 1.3). The quantity of condensate processed through the tank battery shall be monitored and recorded monthly and used to calculate emissions as required by Condition 3.1. Records of tank throughput shall be kept in a log to be made available to the Division upon request. The monthly quantity of condensate processed shall be used in a twelve month rolling total to monitor compliance with the annual limitation. Each month a new twelve month total shall be calculated using the previous twelve months' data.
- 3.4 **[State-only]** The condensate tanks covered by this permit are subject to Regulation 7, Section XVII.C. Emission reduction from condensate storage tanks at oil and gas exploration and production operations, natural gas compressor stations, natural gas drip stations and natural gas processing plants (Colorado Regulation No. 7 Section XVII.B & C). These requirements include, but are not limited to:
  - 3.4.1 Beginning May 1, 2008, owners or operators of all atmospheric condensate storage tanks with uncontrolled actual emissions of volatile organic compounds equal to or greater than 20 tons per year based on a rolling twelve-month total shall operate air pollution control equipment that has an average control efficiency of at least 95% for VOCs on such tanks. (Colorado Regulation No. 7 Section XVII.C.1).
  - 3.4.2 **Monitoring**: The owner or operator of any condensate storage tank that is required to control volatile organic compound emissions pursuant to this section XVII.C. shall visually inspect or monitor the Air Pollution Control Equipment to ensure that it is operating at least as often as condensate is loaded out from the tank, unless a more frequent inspection or monitoring schedule is followed. In addition, if a flare or other combustion device is used, the owner or operator shall visually inspect the device for visible emissions at least as often as condensate is loaded out from the tank. (Colorado Regulation No. 7 Section XVII.C.3).

Issued: June 1, 2012

- 3.4.3 **Recordkeeping**: The owner or operator of each condensate storage tank shall maintain the following records for a period of five years (Colorado Regulation No. 7 Section XVII.C.4):
  - 3.4.3.1 **XVII.C.4.a.** Monthly condensate production from the tank.
  - 3.4.3.2 **XVII.C.4.b** For any condensate storage tank required to be controlled pursuant to this section XVII.C., the date, time and duration of any period where the air pollution control equipment is not operating. The duration of a period of non-operation shall be from the time that the air pollution control equipment was last observed to be operating until the time the equipment recommences operation.
  - 3.4.3.3 **XVII.C.4.c.** For tanks where a flare or other combustion device is being used, the date and time of any instances where visible emissions are observed from the device.

#### 3.4.4 General Provisions:

- 3.4.4.1 All air pollution control equipment required by Condition 3.4 shall be operated and maintained pursuant to manufacturer specifications or equivalent to the extent practicable, and consistent with technological limitations and good engineering and maintenance practices. The owner or operator shall keep manufacturer specifications or equivalent on file. In addition, all such air pollution control equipment shall be adequately designed and sized to achieve the control efficiency rates required by Condition 3.4.1 and to handle reasonably foreseeable fluctuations in emissions of volatile organic compounds during normal operations. Fluctuations in emissions that occur when the separator dumps into the tank are reasonably foreseeable (Colorado Regulation No. 7 Section XVII.B.1.a).
- 3.4.4.2 All condensate collection, storage, processing and handling operations, regardless of size, shall be designed, operated and maintained so as to minimize leakage of volatile organic compounds to the atmosphere to the extent reasonably practicable (Colorado Regulation No. 7 Section XVII.B.1.b).
- 3.5 Emission Control or Recycling Equipment Monitoring Requirements:
  - 3.5.1 Thief hatch seals shall be inspected for integrity annually and replaced as necessary.
  - 3.5.2 Thief hatch covers shall be weighted and properly seated.
  - 3.5.3 All tank hatches shall remain closed and latched when not in use.
  - 3.5.4 Pressure relief valves (PRV) shall be inspected annually for proper operation and replaced as necessary.
  - 3.5.5 PRVs shall be set to release at a pressure that will ensure flashing, working and breathing losses (as applicable) are routed to the control device under normal operating conditions.

Issued: June 1, 2012

- 3.5.6 Annual inspections shall be documented with an indication of status, a description of any problems found, and their resolution.
- 3.5.7 All maintenance performed on the tanks shall be recorded and kept in a log, and made available to the Division for review upon request.

# 4. FUG: Fugitive VOC Emissions from Equipment Leaks

| Parameter          | Permit<br>Condition<br>Number | Timitation        | Compliance<br>Emission Factor | Monitoring                      |                   |  |
|--------------------|-------------------------------|-------------------|-------------------------------|---------------------------------|-------------------|--|
|                    |                               | Limitation        |                               | Method                          | Interval          |  |
| VOC                | 4.1                           | 47.8 TPY          | See Table 4-1                 | Recordkeeping & Calculation     | Monthly           |  |
|                    |                               | See Table 4-2     |                               | 12 month rolling                |                   |  |
| Leak Inspection    | 4.2                           | See Condition 4.2 |                               | Auditory, visual, and olfactory | Quarterly         |  |
| Hours of operation | 4.3                           |                   |                               | Recordkeeping                   | See Condition 4.3 |  |

4.1 VOC emissions shall not exceed the limitations above (Colorado Construction Permit 07GA0569). Emissions shall be calculated using the emission factors and equations listed below. Monthly emissions shall be used in a twelve month rolling total to monitor compliance with the annual limitations. Each month a new twelve month total shall be calculated using the previous twelve months data. The records shall be kept and made available for Division review upon request.

Emission Factors for individual types of components in lb/component-hr from the reference <u>Protocol for Equipment Leak Emission Estimates, EPA, November 1995, EPA-453/R-95-017, Table 2-4</u>. These emission factors are fixed until changed by established permit modification procedures.

Table 4-1

| Component        | Emission Factors (lb/component-hr) |                        |                      |  |
|------------------|------------------------------------|------------------------|----------------------|--|
|                  | Gas Service                        | Heavy Oil Service      | Light Oil Service    |  |
| Valves           | $9.9 \times 10^{-3}$               | 1.9 × 10 <sup>-5</sup> | $5.5 \times 10^{-3}$ |  |
| Connectors       | $4.4 \times 10^{-4}$               | $1.7 \times 10^{-5}$   | $4.6 \times 10^{-4}$ |  |
| Flanges          | $8.6 \times 10^{-4}$               | $8.6 \times 10^{-7}$   | $2.4 \times 10^{-4}$ |  |
| Pump Seals       | $5.3 \times 10^{-3}$               |                        | $2.9 \times 10^{-4}$ |  |
| Open-Ended Lines | $4.4 \times 10^{-3}$               | $3.1 \times 10^{-4}$   | $3.1 \times 10^{-3}$ |  |
| Other*           | $1.9 \times 10^{-2}$               | $7.1 \times 10^{-5}$   | $1.7 \times 10^{-2}$ |  |

Issued: June 1, 2012

\*Other equipment type includes compressors, pressure relief valves, relief valves, diaphragms, drains, dump arms, hatches, instrument meters, polish rods, and vents.

Calculation of annual emissions of VOC per component:

Component count  $\times$  8760 hrs/year  $\times$  VOC content (wt%)  $\times$  EF

The total fugitive VOC emissions shall be the sum of emissions for each component

- 4.1.1 The most recent extended gas analysis as required under Condition 2.1 (dehy gas) and Condition 3.2 (condensate) of this permit shall be used to determine the appropriate weight %VOC to use in the above equation.
- 4.1.2 The component count listed in the Table 4-2 below was used to determine the VOC emission limit. A physical hard-count shall be conducted every five years to monitor compliance with this condition. Records of the component counts shall be kept and made available for Division review upon request.

Table 4-2

| Component         | Component Count |               |               |
|-------------------|-----------------|---------------|---------------|
|                   | Gas Service     | Heavy Liquids | Light Liquids |
| Valves            | 1241            | 380           | 688           |
| Connectors        | 16403           | 7504          | 5325          |
| Flanges           | 981             | 407           | 63            |
| Pump Seals        |                 | 19            | 2             |
| Open-Ended Lines  | 1               | 4             | 6             |
| Other*            | 88              |               | 1             |
| VOC Content (wt%) | 20.0            | 100.0         | 100.0         |

<sup>\*</sup>Other equipment type includes compressors, pressure relief valves, relief valves, diaphragms, drains, dump arms, hatches, instrument meters, polish rods, and vents.

- 4.2 Auditory, visual, and olfactory inspections for equipment leaks shall be performed quarterly. The results of these inspections shall be recorded in a log and made available for Division review upon request.
- 4.3 Hours of operation of the facility shall be monitored and recorded monthly in a log that is to be made available to the Division upon request. Hours of operation shall be used to calculate monthly emissions in Condition 4.1.

Issued: June 1, 2012

### 5. FLARE: Flare

| Parameter          | Permit<br>Condition | Limitation                      | Emission<br>Factor | Monitoring                   |              |
|--------------------|---------------------|---------------------------------|--------------------|------------------------------|--------------|
| 1 W.W              | Number              | 2                               | (lb/MMBtu)         | Method                       | Interval     |
| $NO_X$             | 5.1                 | 2.6 TPY                         | 0.138              | Recordkeeping &              | Monthly      |
| СО                 |                     | 5.1 TPY                         | 0.2755             | Calculation 12 month rolling |              |
| Gas Throughput     | 5.2                 | Dehy: 25.23 MMscf/yr            |                    |                              |              |
|                    |                     | Condensate tanks: 7.87 MMscf/yr |                    |                              |              |
|                    |                     | Pilot gas: 1.74 MMscf/yr        |                    |                              |              |
| Pilot Flame        | 5.3                 | Must be present at all times    |                    | Recordkeeping                | Continuously |
| Opacity            | 5.4                 | Not to exceed 30%               |                    | EPA Method 9                 | Annually     |
| Hours of Operation | 5.5                 |                                 |                    | Recordkeeping                | Monthly      |

5.1 Emissions of NO<sub>X</sub> and CO from the flare shall not exceed the limitations stated above (Colorado Construction Permit 07GA0569, as modified under the provisions of Section I, Condition 1.3, to remove the monthly limits). Compliance with the emission limitations shall be calculated as follows:

 $Tons/mo = \underbrace{[EF (lb/MMBtu) \times Fuel Combusted (MMscf/d) \times Heat Value (Btu/SCF)*Hours of Operation (hr/mo)]}_{24 (hr/d) \times 2000 (lb/ton)}$ 

The fuel combusted and heat content for the above equation shall be determined from the E&P TANKS and GLYCalc outputs for the tanks and the dehydrators, respectively. Monthly emissions shall be used in a twelve month rolling total to monitor compliance with the annual limitations. Each month a new twelve month total shall be calculated using the previous twelve months data.

- 5.2 The quantity of gas combusted shall not exceed the above limitation (Colorado Construction Permit 07GA0569). The quantity of gas combusted by the flare from the dehydrator still vents and flash tanks, condensate storage tanks, and pilot gas shall be calculated and recorded monthly. This combusted gas throughput shall be used to calculate monthly emissions to be used in a rolling twelve month total as specified in Condition 5.1. Records of gas combusted shall be kept in a log to be made available to the Division upon request. Monthly gas combustion by the flare shall be used in a twelve month rolling total to monitor compliance with the annual limitation. Each month, a new twelve month total shall be calculated using the previous twelve months data.
- 5.3 Flares shall be operated with a flame present at all times that waste gas is being routed to the flare. The presence of a flare pilot flame shall be monitored using a thermocouple or any other equivalent device approved by the Division to detect the presence of a flame. Records of the times and duration of all periods of pilot flame outages shall be maintained and made available to the Division upon request.

Issued: June 1, 2012

5.4 The flares shall not exceed 30% opacity for a period or periods aggregating more than six minutes in any sixty consecutive minutes (Colorado Regulation No. 1, II.A.5). Compliance with the opacity requirement shall be monitored by conducting a non-Method 9 visible emission observation annually when the flare is combusting waste gas. The annual observation shall last a minimum of five minutes. If no visible emissions are present during this observation, in the absence of credible evidence to the contrary, the flare will be considered in compliance with the above opacity requirement. If visible emissions are noted during the observation then an EPA Reference Method 9 opacity observation shall be performed to determine compliance with the opacity standard.

The EPA Reference Method 9 opacity observations shall be performed by an observer with current and valid Method 9 certification.

Subject to the provisions of C.R.S. 25-7-123.1 and in the absence of credible evidence to the contrary, exceedance of the limit shall be considered to exist from the time a Method 9 reading is taken that shows an exceedance of the opacity limit until a Method 9 reading is taken that shows the opacity is less than the opacity limit.

5.5 Hours of operation shall be recorded monthly. Hours of operation shall be used to calculate monthly emissions to be used in a rolling twelve month total as specified in Condition 5.1.

#### 6. LOADING: Tank Truck Loadout

| Parameter                | Permit Condition Limi | Limitation    | Compliance Emission<br>Factor | Monitoring                      |          |
|--------------------------|-----------------------|---------------|-------------------------------|---------------------------------|----------|
|                          | Number                | Limitation    |                               | Method                          | Interval |
| VOC                      | 6.1                   | 3.2 TPY       | 0.1436 lb/bbl loaded          | Recordkeeping &                 | Monthly  |
| Condensate<br>Throughput | 6.2                   | 43,800 bbl/yr |                               | Calculation<br>12 month rolling |          |

6.1 VOC emissions from condensate truck loading shall not exceed the limitations stated above (Construction Permit 07GA0569). VOC emissions shall be calculated monthly using the compliance emission factor above (calculated from methodology in AP 42 Chapter 5-2) in the following equation:

tons/mo = EF (lb/Mgallons) x Condensate Throughput (gallon/mo) 1000 gallons x 2000 (lb/ton)

Monthly emissions of VOC will be used in a rolling twelve month total to monitor compliance with the annual limitation. Each month a new twelve month total shall be calculated using the previous twelve months' data.

6.2 The quantity of condensate loaded into trucks shall not exceed the limitations stated above (Construction Permit 07GA0569 as modified under the provisions of Section II, Condition 1.3). The quantity of condensate loaded into trucks shall be monitored and recorded monthly and used

Issued: June 1, 2012

to calculate emissions as required by Condition 6.1. Monthly condensate throughput shall be the sum of all loading activities within that month. This sum will be used in a rolling twelve month total to monitor compliance with the annual limitation. Each month a new twelve month total shall be calculated using the previous twelve months' data. Records of condensate throughput shall be kept in a log to be made available to the Division upon request.

# 7. Facility Wide

| Parameter                | Permit<br>Condition<br>Number | Limitation | Compliance Emission<br>Factor | Monitoring        |          |
|--------------------------|-------------------------------|------------|-------------------------------|-------------------|----------|
|                          |                               |            |                               | Method            | Interval |
| Maintenance<br>Practices | 7.1                           |            |                               | See Condition 7.1 |          |
| Fence and Signs          | 7.2                           |            |                               | See Condition 7   | 7.2      |

- 7.1 All equipment at this facility shall be operated and maintained in accordance with internal operating and maintenance standards, which shall consider manufacturer's recommendations and good engineering practices, at all times, including periods of start-up, shut-down and malfunction. This includes but is not limited to: inspecting and replacing engine catalysts annually, changing spark plugs and oil filter as necessary, periodically inspecting and adjusting dehy components and annually testing relief valves. Any maintenance performed on the permitted equipment shall be documented and made available to the Division upon request.
- 7.2 This facility shall be completely enclosed by a fence and posted with no trespassing signs that preclude public access to this site as described in modeling analysis for this facility. This requirements is imposed as a result of the modeled ambient air  $NO_X$  and CO impacts that result from the facility operations (Colorado Construction Permit 07GA0569)

#### 8. Portable Monitoring (ver 6/1/06)

Emission measurements of nitrogen oxides  $(NO_X)$  and carbon monoxide (CO) shall be conducted quarterly using a portable flue gas analyzer. At least one calendar month shall separate the quarterly tests. Note that if the engine is operated for less than 100 hrs in any quarterly period, then the portable monitoring requirements do not apply. The quarterly tests need not be on a calendar basis provided a test is conducted at least once in every 3 month period. An EPA Reference Method test can replace a required portable analyzer test if conducted within the same test period as the portable analyzer test it replaces.

All portable analyzer testing required by this permit shall be conducted using the Division's Portable Analyzer Monitoring Protocol (ver March 2006 or newer) as found on the Division's website at: <a href="http://www.cdphe.state.co.us/ap/down/portanalyzeproto.pdf">http://www.cdphe.state.co.us/ap/down/portanalyzeproto.pdf</a>

Results of the portable analyzer tests shall be used to monitor the compliance status of this unit. For comparison with an annual or short term emission limit, the results of the tests shall be converted to a lb/hr basis and multiplied by the allowable operating hours in the month or year (whichever applies) in

Issued: June 1, 2012

order to monitor compliance. If a source is not limited in its hours of operation the test results will be multiplied by the maximum number of hours in the month or year (8760), whichever applies.

If the portable analyzer results indicate compliance with both the  $NO_X$  and CO emission limitations, in the absence of credible evidence to the contrary, the source may certify that the engine is in compliance with both the  $NO_X$  and CO emission limitations for the relevant time period.

Subject to the provisions of C.R.S. 25-7-123.1 and in the absence of credible evidence to the contrary, if the portable analyzer results fail to demonstrate compliance with either the  $NO_X$  or CO emission limitations, the engine will be considered to be out of compliance from the date of the portable analyzer test until a portable analyzer test indicates compliance with both the  $NO_X$  and CO emission limitations or until the engine is taken offline.

For comparison with the emission rates/factors, the emission rates/factors determined by the portable analyzer tests and approved by the Division shall be converted to the same units as the emission rates/factors in the permit. If the portable analyzer tests shows that either the NO<sub>X</sub> or CO emission rates/factors are greater than the relevant ones set forth in the permit, and in the absence of subsequent testing results to the contrary (as approved by the Division), the permittee shall apply for a modification to this permit to reflect, at a minimum, the higher emission rate/factor within 60 days of the completion of the test.

Results of all tests conducted shall be kept on site and made available to the Division upon request.

Issued: June 1, 2012

## **SECTION III - Permit Shield**

Regulation No. 3, 5 CCR 1001-5, Part C, §§ I.A.4, V.D. & XIII.B; § 25-7-114.4(3)(a), C.R.S.

## 1. Specific Non-Applicable Requirements

Based on the information available to the Division and supplied by the applicant, the following parameters and requirements have been specifically identified as non-applicable to the facility to which this permit has been issued. This shield does not protect the source from any violations that occurred prior to or at the time of permit issuance. In addition, this shield does not protect the source from any violations that occur as a result of any modifications or reconstruction on which construction commenced prior to permit issuance.

| Emission Unit      | Applicable Requirement              | Justification  |
|--------------------|-------------------------------------|--|
| TANKS - Condensate | 40 CFR 60 Subpart K, Ka             | All tanks storing volatile organic liquids were constructed    |
| Tank Battery       |                                     | after July 23, 1984, therefore, are not affected facilities    |
|                    |                                     | under this rule.   |
| TANKS - Condensate | 40 CFR 60 Subpart Kb                | All tanks storing volatile organic liquids are less than 75    |
| Tank Battery       |                                     | cubic meters, therefore, are not affected facilities under     |
|                    |                                     | this rule.   |
| Facility           | 40 CFR 60 Subpart KKK               | This site does not meet the definition of a natural gas        |
|                    |                                     | processing plant, therefore, is not an affected facility under |
|                    |                                     | this rule.   |
| Facility           | Regulation No. 3, Part D            | This facility is not a major source as defined in this         |
|                    |                                     | regulation therefore, is not subject to this part of the       |
|                    |                                     | regulation.  |
| Facility           | Regulation No. 7, Sections III, IV, | This facility is not located in a non-attainment area,         |
|                    | VI, VII, VIII, XII, XVI, XVIII      | therefore, is not subject to these sections of the regulation. |

#### 2. General Conditions

Compliance with this Operating Permit shall be deemed compliance with all applicable requirements specifically identified in the permit and other requirements specifically identified in the permit as not applicable to the source. This permit shield shall not alter or affect the following:

- 2.1 The provisions of §§ 25-7-112 and 25-7-113, C.R.S., or § 303 of the federal act, concerning enforcement in cases of emergency;
- 2.2 The liability of an owner or operator of a source for any violation of applicable requirements prior to or at the time of permit issuance;
- 2.3 The applicable requirements of the federal Acid Rain Program, consistent with § 408(a) of the federal act;
- 2.4 The ability of the Air Pollution Control Division to obtain information from a source pursuant to §25-7-111(2)(I), C.R.S., or the ability of the Administrator to obtain information pursuant to § 114 of the federal act:

Operating Permit 09OPGA339

Issued: June 1, 2012

- 2.5 The ability of the Air Pollution Control Division to reopen the Operating Permit for cause pursuant to Regulation No. 3, Part C, § XIII.
- 2.6 Sources are not shielded from terms and conditions that become applicable to the source subsequent to permit issuance.

#### 3. Streamlined Conditions

The following applicable requirements have been subsumed within this operating permit using the pertinent streamlining procedures approved by the U.S. EPA. For purposes of the permit shield, compliance with the listed permit conditions will also serve as a compliance demonstration for purposes of the associated subsumed requirements.

| Permit Condition | Streamlined (Subsumed) Requirements |
|------------------|-------------------------------------|
|                  | No requirements were streamlined.   |

## **SECTION IV - General Permit Conditions (ver 11/16/2010)**

#### 1. Administrative Changes

#### Regulation No. 3, 5 CCR 1001-5, Part A, § III.

The permittee shall submit an application for an administrative permit amendment to the Division for those permit changes that are described in Regulation No. 3, Part A, § I.B.1. The permittee may immediately make the change upon submission of the application to the Division.

## 2. Certification Requirements

## Regulation No. 3, 5 CCR 1001-5, Part C, §§ III.B.9., V.C.16.a.& e. and V.C.17.

- a. Any application, report, document and compliance certification submitted to the Air Pollution Control Division pursuant to Regulation No. 3 or the Operating Permit shall contain a certification by a responsible official of the truth, accuracy and completeness of such form, report or certification stating that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate and complete.
- b. All compliance certifications for terms and conditions in the Operating Permit shall be submitted to the Air Pollution Control Division at least annually unless a more frequent period is specified in the applicable requirement or by the Division in the Operating Permit.
- c. Compliance certifications shall contain:
  - (i) the identification of each permit term and condition that is the basis of the certification;
  - (ii) the compliance status of the source;
  - (iii) whether compliance was continuous or intermittent;
  - (iv) method(s) used for determining the compliance status of the source, currently and over the reporting period; and
  - (v) such other facts as the Air Pollution Control Division may require to determine the compliance status of the source.
- d. All compliance certifications shall be submitted to the Air Pollution Control Division and to the Environmental Protection Agency at the addresses listed in Appendix D of this Permit.
- e. If the permittee is required to develop and register a risk management plan pursuant to § 112(r) of the federal act, the permittee shall certify its compliance with that requirement; the Operating Permit shall not incorporate the contents of the risk management plan as a permit term or condition.

#### 3. Common Provisions

#### Common Provisions Regulation, 5 CCR 1001-2 §§ II.A., II.B., II.C., II.E., II.F., II.I, and II.J

a. To Control Emissions Leaving Colorado

When emissions generated from sources in Colorado cross the State boundary line, such emissions shall not cause the air quality standards of the receiving State to be exceeded, provided reciprocal action is taken by the receiving State.

b. Emission Monitoring Requirements

The Division may require owners or operators of stationary air pollution sources to install, maintain, and use instrumentation to monitor and record emission data as a basis for periodic reports to the Division.

c. Performance Testing

The owner or operator of any air pollution source shall, upon request of the Division, conduct performance test(s) and furnish the Division a written report of the results of such test(s) in order to determine compliance with applicable emission control regulations.

Performance test(s) shall be conducted and the data reduced in accordance with the applicable reference test methods unless the Division:

- (i) specifies or approves, in specific cases, the use of a test method with minor changes in methodology;
- (ii) approves the use of an equivalent method;
- (iii) approves the use of an alternative method the results of which the Division has determined to be adequate for indicating where a specific source is in compliance; or
- (iv) waives the requirement for performance test(s) because the owner or operator of a source has demonstrated by other means to the Division's satisfaction that the affected facility is in compliance with the standard. Nothing in this paragraph shall be construed to abrogate the Commission's or Division's authority to require testing under the Colorado Revised Statutes, Title 25, Article 7, and pursuant to regulations promulgated by the Commission.

Compliance test(s) shall be conducted under such conditions as the Division shall specify to the plant operator based on representative performance of the affected facility. The owner or operator shall make available to the Division such records as may be necessary to determine the conditions of the performance test(s). Operations during period of startup, shutdown, and malfunction shall not constitute representative conditions of performance test(s) unless otherwise specified in the applicable standard.

The owner or operator of an affected facility shall provide the Division thirty days prior notice of the performance test to afford the Division the opportunity to have an observer present. The Division may waive the thirty day notice requirement provided that arrangements satisfactory to the Division are made for earlier testing.

The owner or operator of an affected facility shall provide, or cause to be provided, performance testing facilities as follows:

- (i) Sampling ports adequate for test methods applicable to such facility;
- (ii) Safe sampling platform(s);
- (iii) Safe access to sampling platform(s); and
- (iv) Utilities for sampling and testing equipment.

Each performance test shall consist of at least three separate runs using the applicable test method. Each run shall be conducted for the time and under the conditions specified in the applicable standard. For the purpose of determining compliance with an applicable standard, the arithmetic mean of results of at least three runs shall apply. In the event that a sample is accidentally lost or conditions occur in which one of the runs must be discontinued because of forced shutdown, failure of an irreplaceable portion of the sample train, extreme meteorological conditions, or other circumstances beyond the owner or operator's control, compliance may, upon the Division's approval, be determined using the arithmetic mean of the results of the two other runs.

Nothing in this section shall abrogate the Division's authority to conduct its own performance test(s) if so warranted.

d. Affirmative Defense Provision for Excess Emissions during Malfunctions

Note that until such time as the U.S. EPA approves this provision into the Colorado State Implementation Plan (SIP), it shall be enforceable only by the State.

An affirmative defense to a claim of violation under these regulations is provided to owners and operators for civil penalty actions for excess emissions during periods of malfunction. To establish the affirmative defense and to be relieved of a civil penalty in any action to enforce an applicable requirement, the owner or operator of the facility must meet the notification requirements below in a timely manner and prove by a preponderance of evidence that:

- (i) The excess emissions were caused by a sudden, unavoidable breakdown of equipment, or a sudden, unavoidable failure of a process to operate in the normal or usual manner, beyond the reasonable control of the owner or operator;
- (ii) The excess emissions did not stem from any activity or event that could have reasonably been foreseen and avoided, or planned for, and could not have been avoided by better operation and maintenance practices;
- (iii) Repairs were made as expeditiously as possible when the applicable emission limitations were being exceeded;
- (iv) The amount and duration of the excess emissions (including any bypass) were minimized to the maximum extent practicable during periods of such emissions;
- (v) All reasonably possible steps were taken to minimize the impact of the excess emissions on ambient air quality;
- (vi) All emissions monitoring systems were kept in operation (if at all possible);
- (vii) The owner or operator's actions during the period of excess emissions were documented by properly signed, contemporaneous operating logs or other relevant evidence;
- (viii) The excess emissions were not part of a recurring pattern indicative of inadequate design, operation, or maintenance:
- (ix) At all times, the facility was operated in a manner consistent with good practices for minimizing emissions. This section is intended solely to be a factor in determining whether an affirmative defense is available to an owner or operator, and shall not constitute an additional applicable requirement; and
- (x) During the period of excess emissions, there were no exceedances of the relevant ambient air quality standards established in the Commissions' Regulations that could be attributed to the emitting source.

The owner or operator of the facility experiencing excess emissions during a malfunction shall notify the division verbally as soon as possible, but no later than noon of the Division's next working day, and shall submit written notification following the initial occurrence of the excess emissions by the end of the source's next reporting period. The notification shall address the criteria set forth above.

The Affirmative Defense Provision contained in this section shall not be available to claims for injunctive relief.

The Affirmative Defense Provision does not apply to failures to meet federally promulgated performance standards or emission limits, including, but not limited to, new source performance standards and national emission standards for hazardous air pollutants. The affirmative defense provision does not apply to state implementation plan (sip) limits or permit limits that have been set taking into account potential emissions during malfunctions, including, but not necessarily limited to, certain limits with 30-day or longer averaging times, limits that indicate they apply during malfunctions, and limits that indicate they apply at all times or without exception.

#### e. Circumvention Clause

A person shall not build, erect, install, or use any article, machine, equipment, condition, or any contrivance, the use of which, without resulting in a reduction in the total release of air pollutants to the atmosphere, reduces or conceals an emission which would otherwise constitute a violation of this regulation. No person shall circumvent this regulation by using more openings than is considered normal practice by the industry or activity in question.

## f. Compliance Certifications

For the purpose of submitting compliance certifications or establishing whether or not a person has violated or is in violation of any standard in the Colorado State Implementation Plan, nothing in the Colorado State Implementation Plan shall preclude the use, including the exclusive use, of any credible evidence or information, relevant to whether a source would have been in compliance with applicable requirements if the appropriate performance or compliance test or procedure had been performed. Evidence that has the effect of making any relevant standard or permit term more stringent shall not be credible for proving a violation of the standard or permit term.

When compliance or non-compliance is demonstrated by a test or procedure provided by permit or other applicable requirement, the owner or operator shall be presumed to be in compliance or non-compliance unless other relevant credible evidence overcomes that presumption.

g. Affirmative Defense Provision for Excess Emissions During Startup and Shutdown

An affirmative defense is provided to owners and operators for civil penalty actions for excess emissions during periods of startup and shutdown. To establish the affirmative defense and to be relieved of a civil penalty in any action to enforce an applicable requirement, the owner or operator of the facility must meet the notification requirements below in a timely manner and prove by a preponderance of the evidence that:

- (i) The periods of excess emissions that occurred during startup and shutdown were short and infrequent and could not have been prevented through careful planning and design;
- (ii) The excess emissions were not part of a recurring pattern indicative of inadequate design, operation or maintenance:
- (iii) If the excess emissions were caused by a bypass (an intentional diversion of control equipment), then the bypass was unavoidable to prevent loss of life, personal injury, or severe property damage;
- (iv) The frequency and duration of operation in startup and shutdown periods were minimized to the maximum extent practicable;
- (v) All possible steps were taken to minimize the impact of excess emissions on ambient air quality;
- (vi) All emissions monitoring systems were kept in operation (if at all possible);
- (vii) The owner or operator's actions during the period of excess emissions were documented by properly signed, contemporaneous operating logs or other relevant evidence; and,
- (viii) At all times, the facility was operated in a manner consistent with good practices for minimizing emissions. This subparagraph is intended solely to be a factor in determining whether an affirmative defense is available to an owner or operator, and shall not constitute an additional applicable requirement.

The owner or operator of the facility experiencing excess emissions during startup and shutdown shall notify the Division verbally as soon as possible, but no later than two (2) hours after the start of the next working day, and shall submit written quarterly notification following the initial occurrence of the excess emissions. The notification shall address the criteria set forth above.

The Affirmative Defense Provision contained in this section shall not be available to claims for injunctive relief.

The Affirmative Defense Provision does not apply to State Implementation Plan provisions or other requirements that derive from new source performance standards or national emissions standards for hazardous air pollutants, or any other federally enforceable performance standard or emission limit with an averaging time greater than twenty-four hours. In addition, an affirmative defense cannot be used by a single source or small group of sources where the excess emissions have the potential to cause an exceedance of the ambient air quality standards or Prevention of Significant Deterioration (PSD) increments.

In making any determination whether a source established an affirmative defense, the Division shall consider the information within the notification required above and any other information the Division deems necessary, which may include, but is not limited to, physical inspection of the facility and review of documentation pertaining to the maintenance and operation of process and air pollution control equipment.

#### 4. Compliance Requirements

## Regulation No. 3, 5 CCR 1001-5, Part C, §§ III.C.9., V.C.11. & 16.d. and § 25-7-122.1(2), C.R.S.

- a. The permittee must comply with all conditions of the Operating Permit. Any permit noncompliance relating to federally-enforceable terms or conditions constitutes a violation of the federal act, as well as the state act and Regulation No. 3. Any permit noncompliance relating to state-only terms or conditions constitutes a violation of the state act and Regulation No. 3, shall be enforceable pursuant to state law, and shall not be enforceable by citizens under § 304 of the federal act. Any such violation of the federal act, the state act or regulations implementing either statute is grounds for enforcement action, for permit termination, revocation and reissuance or modification or for denial of a permit renewal application.
- b. It shall not be a defense for a permittee in an enforcement action or a consideration in favor of a permittee in a permit termination, revocation or modification action or action denying a permit renewal application that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of the permit.
- c. The permit may be modified, revoked, reopened, and reissued, or terminated for cause. The filing of any request by the permittee for a permit modification, revocation and reissuance, or termination, or any notification of planned changes or anticipated noncompliance does not stay any permit condition, except as provided in §§ X. and XI. of Regulation No. 3, Part C.
- d. The permittee shall furnish to the Air Pollution Control Division, within a reasonable time as specified by the Division, any information that the Division may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit or to determine compliance with the permit. Upon request, the permittee shall also furnish to the Division copies of records required to be kept by the permittee, including information claimed to be confidential. Any information subject to a claim of confidentiality shall be specifically identified and submitted separately from information not subject to the claim.
- e. Any schedule for compliance for applicable requirements with which the source is not in compliance at the time of permit issuance shall be supplemental, and shall not sanction noncompliance with, the applicable requirements on which it is based.
- f. For any compliance schedule for applicable requirements with which the source is not in compliance at the time of permit issuance, the permittee shall submit, at least every 6 months unless a more frequent period is specified in the applicable requirement or by the Air Pollution Control Division, progress reports which contain the following:
  - (i) dates for achieving the activities, milestones, or compliance required in the schedule for compliance, and dates when such activities, milestones, or compliance were achieved; and
  - (ii) an explanation of why any dates in the schedule of compliance were not or will not be met, and any preventive or corrective measures adopted.

Operating Permit 09OPGA339

The permittee shall not knowingly falsify, tamper with, or render inaccurate any monitoring device or method required to be maintained or followed under the terms and conditions of the Operating Permit.

#### 5. **Emergency Provisions**

#### Regulation No. 3, 5 CCR 1001-5, Part C, § VII.E

An emergency means any situation arising from sudden and reasonably unforeseeable events beyond the control of the source, including acts of God, which situation requires immediate corrective action to restore normal operation, and that causes the source to exceed the technology-based emission limitation under the permit due to unavoidable increases in emissions attributable to the emergency. "Emergency" does not include noncompliance to the extent caused by improperly designed equipment, lack of preventative maintenance, careless or improper operation, or operator error. An emergency constitutes an affirmative defense to an enforcement action brought for noncompliance with a technology-based emission limitation if the permittee demonstrates, through properly signed, contemporaneous operating logs, or other relevant evidence

- an emergency occurred and that the permittee can identify the cause(s) of the emergency; a.
- b. the permitted facility was at the time being properly operated;
- c. during the period of the emergency the permittee took all reasonable steps to minimize levels of emissions that exceeded the emission standards, or other requirements in the permit; and
- the permittee submitted oral notice of the emergency to the Air Pollution Control Division no later than noon of the d. next working day following the emergency, and followed by written notice within one month of the time when emissions limitations were exceeded due to the emergency. This notice must contain a description of the emergency, any steps taken to mitigate emissions, and corrective actions taken.

This emergency provision is in addition to any emergency or malfunction provision contained in any applicable requirement.

#### 6. **Emission Controls for Asbestos**

#### Regulation No. 8, 5 CCR 1001-10, Part B

The permittee shall not conduct any asbestos abatement activities except in accordance with the provisions of Regulation No. 8. Part B. "asbestos control."

#### **Emissions Trading, Marketable Permits, Economic Incentives** 7.

#### Regulation No. 3, 5 CCR 1001-5, Part C, § V.C.13.

No permit revision shall be required under any approved economic incentives, marketable permits, emissions trading and other similar programs or processes for changes that are specifically provided for in the permit.

#### 8. **Fee Payment**

#### C.R.S §§ 25-7-114.1(6) and 25-7-114.7

- The permittee shall pay an annual emissions fee in accordance with the provisions of C.R.S. § 25-7-114.7. A 1% a. per month late payment fee shall be assessed against any invoice amounts not paid in full on the 91st day after the date of invoice, unless a permittee has filed a timely protest to the invoice amount.
- The permittee shall pay a permit processing fee in accordance with the provisions of C.R.S. § 25-7-114.7. If the b. Division estimates that processing of the permit will take more than 30 hours, it will notify the permittee of its estimate of what the actual charges may be prior to commencing any work exceeding the 30 hour limit.

Issued: June 1, 2012

c. The permittee shall pay an APEN fee in accordance with the provisions of C.R.S. § 25-7-114.1(6) for each APEN or revised APEN filed.

#### 9. Fugitive Particulate Emissions

#### Regulation No. 1, 5 CCR 1001-3, § III.D.1.

The permittee shall employ such control measures and operating procedures as are necessary to minimize fugitive particulate emissions into the atmosphere, in accordance with the provisions of Regulation No. 1, § III.D.1.

#### 10. Inspection and Entry

#### Regulation No. 3, 5 CCR 1001-5, Part C, § V.C.16.b.

Upon presentation of credentials and other documents as may be required by law, the permittee shall allow the Air Pollution Control Division, or any authorized representative, to perform the following:

- a. enter upon the permittee's premises where an Operating Permit source is located, or emissions-related activity is conducted, or where records must be kept under the terms of the permit;
- b. have access to, and copy, at reasonable times, any records that must be kept under the conditions of the permit;
- c. inspect at reasonable times any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under the Operating Permit;
- d. sample or monitor at reasonable times, for the purposes of assuring compliance with the Operating Permit or applicable requirements, any substances or parameters.

#### 11. Minor Permit Modifications

#### Regulation No. 3, 5 CCR 1001-5, Part C, §§ X. & XI.

The permittee shall submit an application for a minor permit modification before making the change requested in the application. The permit shield shall not extend to minor permit modifications.

#### 12. New Source Review

#### Regulation No. 3, 5 CCR 1001-5, Part B

The permittee shall not commence construction or modification of a source required to be reviewed under the New Source Review provisions of Regulation No. 3, Part B, without first receiving a construction permit.

#### 13. No Property Rights Conveyed

#### Regulation No. 3, 5 CCR 1001-5, Part C, § V.C.11.d.

This permit does not convey any property rights of any sort, or any exclusive privilege.

#### 14. Odor

#### Regulation No. 2, 5 CCR 1001-4, Part A

As a matter of state law only, the permittee shall comply with the provisions of Regulation No. 2 concerning odorous emissions.

Issued: June 1, 2012

## 15. Off-Permit Changes to the Source

## Regulation No. 3, 5 CCR 1001-5, Part C, § XII.B.

The permittee shall record any off-permit change to the source that causes the emissions of a regulated pollutant subject to an applicable requirement, but not otherwise regulated under the permit, and the emissions resulting from the change, including any other data necessary to show compliance with applicable ambient air quality standards. The permittee shall provide contemporaneous notification to the Air Pollution Control Division and to the Environmental Protection Agency at the addresses listed in Appendix D of this Permit. The permit shield shall not apply to any off-permit change.

## 16. Opacity

#### Regulation No. 1, 5 CCR 1001-3, §§ I., II.

The permittee shall comply with the opacity emissions limitation set forth in Regulation No. 1, §§ I.- II.

#### 17. Open Burning

#### Regulation No. 9, 5 CCR 1001-11

The permittee shall obtain a permit from the Division for any regulated open burning activities in accordance with provisions of Regulation No. 9.

#### 18. Ozone Depleting Compounds

#### Regulation No. 15, 5 CCR 1001-17

The permittee shall comply with the provisions of Regulation No. 15 concerning emissions of ozone depleting compounds. Sections I., II.C., II.D., III. IV., and V. of Regulation No. 15 shall be enforced as a matter of state law only.

#### 19. Permit Expiration and Renewal

#### Regulation No. 3, 5 CCR 1001-5, Part C, §§ III.B.6., IV.C., V.C.2.

- a. The permit term shall be five (5) years. The permit shall expire at the end of its term. Permit expiration terminates the permittee's right to operate unless a timely and complete renewal application is submitted.
- b. Applications for renewal shall be submitted at least twelve months, but not more than 18 months, prior to the expiration of the Operating Permit. An application for permit renewal may address only those portions of the permit that require revision, supplementing, or deletion, incorporating the remaining permit terms by reference from the previous permit. A copy of any materials incorporated by reference must be included with the application.

#### 20. Portable Sources

#### Regulation No. 3, 5 CCR 1001-5, Part C, § II.D.

Portable Source permittees shall notify the Air Pollution Control Division at least 10 days in advance of each change in location.

#### 21. Prompt Deviation Reporting

#### Regulation No. 3, 5 CCR 1001-5, Part C, § V.C.7.b.

The permittee shall promptly report any deviation from permit requirements, including those attributable to malfunction conditions as defined in the permit, the probable cause of such deviations, and any corrective actions or preventive measures taken.

"Prompt" is defined as follows:

- a. Any definition of "prompt" or a specific timeframe for reporting deviations provided in an underlying applicable requirement as identified in this permit; or
- b. Where the underlying applicable requirement fails to address the time frame for reporting deviations, reports of deviations will be submitted based on the following schedule:
  - (i) For emissions of a hazardous air pollutant or a toxic air pollutant (as identified in the applicable regulation) that continue for more than an hour in excess of permit requirements, the report shall be made within 24 hours of the occurrence;
  - (ii) For emissions of any regulated air pollutant, excluding a hazardous air pollutant or a toxic air pollutant that continue for more than two hours in excess of permit requirements, the report shall be made within 48 hours; and
  - (iii) For all other deviations from permit requirements, the report shall be submitted every six (6) months, except as otherwise specified by the Division in the permit in accordance with paragraph 22.d. below.
- c. If any of the conditions in paragraphs b.i or b.ii above are met, the source shall notify the Division by telephone (303-692-3155) or facsimile (303-782-0278) based on the timetables listed above. [Explanatory note: Notification by telephone or facsimile must specify that this notification is a deviation report for an Operating Permit.] A written notice, certified consistent with General Condition 2.a. above (Certification Requirements), shall be submitted within 10 working days of the occurrence. All deviations reported under this section shall also be identified in the 6-month report required above.

"Prompt reporting" does not constitute an exception to the requirements of "Emergency Provisions" for the purpose of avoiding enforcement actions.

## 22. Record Keeping and Reporting Requirements

#### Regulation No. 3, 5 CCR 1001-5, Part A, § II.; Part C, §§ V.C.6., V.C.7.

- a. Unless otherwise provided in the source specific conditions of this Operating Permit, the permittee shall maintain compliance monitoring records that include the following information:
  - (i) date, place as defined in the Operating Permit, and time of sampling or measurements;
  - (ii) date(s) on which analyses were performed;
  - (iii) the company or entity that performed the analysis;
  - (iv) the analytical techniques or methods used;
  - (v) the results of such analysis; and
  - (vi) the operating conditions at the time of sampling or measurement.
- b. The permittee shall retain records of all required monitoring data and support information for a period of at least five (5) years from the date of the monitoring sample, measurement, report or application. Support information, for this purpose, includes all calibration and maintenance records and all original strip-chart recordings for continuous monitoring instrumentation, and copies of all reports required by the Operating Permit. With prior approval of the Air Pollution Control Division, the permittee may maintain any of the above records in a computerized form.
- c. Permittees must retain records of all required monitoring data and support information for the most recent twelve (12) month period, as well as compliance certifications for the past five (5) years on-site at all times. A permittee shall make available for the Air Pollution Control Division's review all other records of required monitoring data and support information required to be retained by the permittee upon 48 hours advance notice by the Division.

- d. The permittee shall submit to the Air Pollution Control Division all reports of any required monitoring at least every six (6) months, unless an applicable requirement, the compliance assurance monitoring rule, or the Division requires submission on a more frequent basis. All instances of deviations from any permit requirements must be clearly identified in such reports.
- e. The permittee shall file an Air Pollutant Emissions Notice ("APEN") prior to constructing, modifying, or altering any facility, process, activity which constitutes a stationary source from which air pollutants are or are to be emitted, unless such source is exempt from the APEN filing requirements of Regulation No. 3, Part A, § II.D. A revised APEN shall be filed annually whenever a significant change in emissions, as defined in Regulation No. 3, Part A, § II.C.2., occurs; whenever there is a change in owner or operator of any facility, process, or activity; whenever new control equipment is installed; whenever a different type of control equipment replaces an existing type of control equipment; whenever a permit limitation must be modified; or before the APEN expires. An APEN is valid for a period of five years. The five-year period recommences when a revised APEN is received by the Air Pollution Control Division. Revised APENs shall be submitted no later than 30 days before the five-year term expires. Permittees submitting revised APENs to inform the Division of a change in actual emission rates must do so by April 30 of the following year. Where a permit revision is required, the revised APEN must be filed along with a request for permit revision. APENs for changes in control equipment must be submitted before the change occurs. Annual fees are based on the most recent APEN on file with the Division.

#### 23. Reopenings for Cause

#### Regulation No. 3, 5 CCR 1001-5, Part C, § XIII.

- a. The Air Pollution Control Division shall reopen, revise, and reissue Operating Permits; permit reopenings and reissuance shall be processed using the procedures set forth in Regulation No. 3, Part C, § III., except that proceedings to reopen and reissue permits affect only those parts of the permit for which cause to reopen exists.
- b. The Division shall reopen a permit whenever additional applicable requirements become applicable to a major source with a remaining permit term of three or more years, unless the effective date of the requirements is later than the date on which the permit expires, or unless a general permit is obtained to address the new requirements; whenever additional requirements (including excess emissions requirements) become applicable to an affected source under the acid rain program; whenever the Division determines the permit contains a material mistake or that inaccurate statements were made in establishing the emissions standards or other terms or conditions of the permit; or whenever the Division determines that the permit must be revised or revoked to assure compliance with an applicable requirement.
- c. The Division shall provide 30 days' advance notice to the permittee of its intent to reopen the permit, except that a shorter notice may be provided in the case of an emergency.
- d. The permit shield shall extend to those parts of the permit that have been changed pursuant to the reopening and reissuance procedure.

#### **24.** Section 502(b)(10) Changes

### Regulation No. 3, 5 CCR 1001-5, Part C, § XII.A.

The permittee shall provide a minimum 7-day advance notification to the Air Pollution Control Division and to the Environmental Protection Agency at the addresses listed in Appendix D of this Permit. The permittee shall attach a copy of each such notice given to its Operating Permit.

Operating Permit 09OPGA339 Issued: June 1, 2012

#### 25. Severability Clause

#### Regulation No. 3, 5 CCR 1001-5, Part C, § V.C.10.

In the event of a challenge to any portion of the permit, all emissions limits, specific and general conditions, monitoring, record keeping and reporting requirements of the permit, except those being challenged, remain valid and enforceable.

#### 26. Significant Permit Modifications

#### Regulation No. 3, 5 CCR 1001-5, Part C, § III.B.2.

The permittee shall not make a significant modification required to be reviewed under Regulation No. 3, Part B ("Construction Permit" requirements) without first receiving a construction permit. The permittee shall submit a complete Operating Permit application or application for an Operating Permit revision for any new or modified source within twelve months of commencing operation, to the address listed in Item 1 in Appendix D of this permit. If the permittee chooses to use the "Combined Construction/Operating Permit" application procedures of Regulation No. 3, Part C, then the Operating Permit must be received prior to commencing construction of the new or modified source.

### 27. Special Provisions Concerning the Acid Rain Program

### Regulation No. 3, 5 CCR 1001-5, Part C, §§ V.C.1.b. & 8

- a. Where an applicable requirement of the federal act is more stringent than an applicable requirement of regulations promulgated under Title IV of the federal act, 40 Code of Federal Regulations (CFR) Part 72, both provisions shall be incorporated into the permit and shall be federally enforceable.
- b. Emissions exceeding any allowances that the source lawfully holds under Title IV of the federal act or the regulations promulgated thereunder, 40 CFR Part 72, are expressly prohibited.

#### 28. Transfer or Assignment of Ownership

#### Regulation No. 3, 5 CCR 1001-5, Part C, § II.C.

No transfer or assignment of ownership of the Operating Permit source will be effective unless the prospective owner or operator applies to the Air Pollution Control Division on Division-supplied Administrative Permit Amendment forms, for reissuance of the existing Operating Permit. No administrative permit shall be complete until a written agreement containing a specific date for transfer of permit, responsibility, coverage, and liability between the permittee and the prospective owner or operator has been submitted to the Division.

#### 29. Volatile Organic Compounds

#### Regulation No. 7, 5 CCR 1001-9, §§ III & V.

The requirements in paragraphs a, b and e apply to sources located in an ozone non-attainment area or the Denver 1-hour ozone attainment/maintenance area. The requirements in paragraphs c and d apply statewide.

a. All storage tank gauging devices, anti-rotation devices, accesses, seals, hatches, roof drainage systems, support structures, and pressure relief valves shall be maintained and operated to prevent detectable vapor loss except when opened, actuated, or used for necessary and proper activities (e.g. maintenance). Such opening, actuation, or use shall be limited so as to minimize vapor loss.

Detectable vapor loss shall be determined visually, by touch, by presence of odor, or using a portable hydrocarbon analyzer. When an analyzer is used, detectable vapor loss means a VOC concentration exceeding 10,000 ppm. Testing shall be conducted as in Regulation No. 7, Section VIII.C.3.

b. Except when otherwise provided by Regulation No. 7, all volatile organic compounds, excluding petroleum liquids, transferred to any tank, container, or vehicle compartment with a capacity exceeding 212 liters (56 gallons), shall be

transferred using submerged or bottom filling equipment. For top loading, the fill tube shall reach within six inches of the bottom of the tank compartment. For bottom-fill operations, the inlet shall be flush with the tank bottom.

- c. The permittee shall not dispose of volatile organic compounds by evaporation or spillage unless Reasonably Available Control Technology (RACT) is utilized.
- d. No owner or operator of a bulk gasoline terminal, bulk gasoline plant, or gasoline dispensing facility as defined in Colorado Regulation No. 7, Section VI, shall permit gasoline to be intentionally spilled, discarded in sewers, stored in open containers, or disposed of in any other manner that would result in evaporation.
- e. Beer production and associated beer container storage and transfer operations involving volatile organic compounds with a true vapor pressure of less than 1.5 PSIA actual conditions are exempt from the provisions of paragraph b, above.

### 30. Wood Stoves and Wood burning Appliances

#### Regulation No. 4, 5 CCR 1001-6

The permittee shall comply with the provisions of Regulation No. 4 concerning the advertisement, sale, installation, and use of wood stoves and wood burning appliances.

Operating Permit 09OPGA339

# **OPERATING PERMIT APPENDICES**

- A INSPECTION INFORMATION
- **B-MONITORING AND PERMIT DEVIATION REPORT**
- C COMPLIANCE CERTIFICATION REPORT
- D NOTIFICATION ADDRESSES
- **E-PERMIT ACRONYMS**
- F PERMIT MODIFICATIONS
- G ENGINE AOS APPLICABILITY REPORTS

# \*DISCLAIMER:

None of the information found in these Appendices shall be considered to be State or Federally enforceable, except as otherwise provided in the permit, and is presented to assist the source, permitting authority, inspectors, and citizens.

# **APPENDIX A - Inspection Information**

#### 1. Directions to Plant:

Take exit 97 (Silt) off I-70 then take the frontage road east.

From the frontage road take the first right (south) the road will tee, turn right (west).

Turn left (south) on Dry Hollow Road or CR331, turn left on Alta Mesa Road (this is not marked)

Follow this road staying to the left at all times until you arrive at the station.

The speed limit is 15 mph, if you come to Chipperfield you have gone too far.

## 2. Safety Equipment Required:

Fire Retardant Clothing; Safety Glasses; Hard Hat; Safety Shoes; Hearing Protection

## 3. Facility Plot Plan:


The attached Figure (following page) shows the plot plan as submitted with draft comments on January 23, 2011.

## 4. List of Insignificant Activities:

The following list of insignificant activities was provided by the source to assist in the understanding of the facility layout. Since there is no requirement to update such a list, activities may have changed since the last filing.

- Three (3) 1.28 MMBtu/hr Reboilers
- 0.942 MMBtu/hr Reboiler
- Seven (7) 0.75 MMBtu/hr Tank Heaters
- Gas-driven Pneumatic Devices
- Chemical storage tanks or containers that hold less than 500 gallons, and which have a daily throughput less than 25 gallons.
- Chemical storage areas where chemicals are stored in closed containers, and where total storage capacity does not exceed 5000 gallons.
- Oil production wastewater (produced water tanks), containing less than 1% by volume crude oil.
- Storage tanks of capacity < 40,000 gallons of lubricating oils</li>
- Crude oil or condensate storage tanks with a capacity of 40,000 gallons or less.

Issued: June 1, 2012

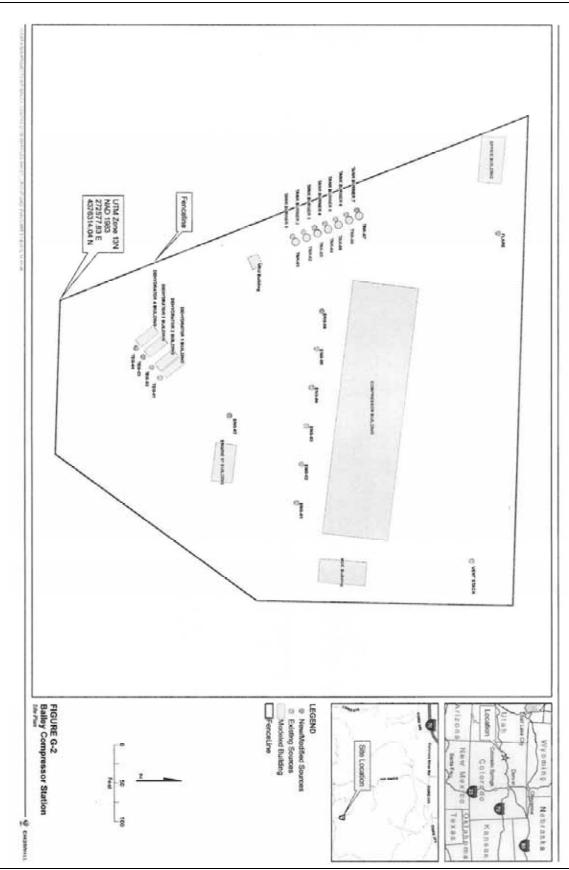

#### APPENDIX B

## **Reporting Requirements and Definitions**

with codes ver 2/20/07

Please note that, pursuant to 113(c)(2) of the federal Clean Air Act, any person who knowingly:

- (A) makes any false material statement, representation, or certification in, or omits material information from, or knowingly alters, conceals, or fails to file or maintain any notice, application, record, report, plan, or other document required pursuant to the Act to be either filed or maintained (whether with respect to the requirements imposed by the Administrator or by a State);
- (B) fails to notify or report as required under the Act; or
- (C) falsifies, tampers with, renders inaccurate, or fails to install any monitoring device or method required to be maintained or followed under the Act shall, upon conviction, be punished by a fine pursuant to title 18 of the United States Code, or by imprisonment for not more than 2 years, or both. If a conviction of any person under this paragraph is for a violation committed after a first conviction of such person under this paragraph, the maximum punishment shall be doubled with respect to both the fine and imprisonment.

The permittee must comply with all conditions of this operating permit. Any permit noncompliance constitutes a violation of the Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or for denial of a permit renewal application.

The Part 70 Operating Permit program requires three types of reports to be filed for all permits.

All required reports must be certified by a responsible official.

## **Report #1: Monitoring Deviation Report** (due at least every six months)

For purposes of this operating permit, the Division is requiring that the monitoring reports are due every six months unless otherwise noted in the permit. All instances of deviations from permit monitoring requirements must be clearly identified in such reports.

For purposes of this operating permit, monitoring means any condition determined by observation, by data from any monitoring protocol, or by any other monitoring which is required by the permit as well as the recordkeeping associated with that monitoring. This would include, for example, fuel use or process rate monitoring, fuel analyses, and operational or control device parameter monitoring.

## **Report #2: Permit Deviation Report (must be reported "promptly")**

In addition to the monitoring requirements set forth in the permits as discussed above, each and every requirement of the permit is subject to deviation reporting. The reports must address deviations from permit requirements, including those attributable to malfunctions as defined in this Appendix, the probable cause of

Operating Permit 09OPGA339 Issued: June 1, 2012

such deviations, and any corrective actions or preventive measures taken. All deviations from any term or condition of the permit are required to be summarized or referenced in the annual compliance certification.

For purposes of this operating permit, "malfunction" shall refer to both emergency conditions and malfunctions. Additional discussion on these conditions is provided later in this Appendix.

For purposes of this operating permit, the Division is requiring that the permit deviation reports are due as set forth in General Condition 21. Where the underlying applicable requirement contains a definition of prompt or otherwise specifies a time frame for reporting deviations, that definition or time frame shall govern. For example, quarterly Excess Emission Reports required by an NSPS or Regulation No. 1, Section IV.

In addition to the monitoring deviations discussed above, included in the meaning of deviation for the purposes of this operating permit are any of the following:

- (1) A situation where emissions exceed an emission limitation or standard contained in the permit;
- (2) A situation where process or control device parameter values demonstrate that an emission limitation or standard contained in the permit has not been met;
- (3) A situation in which observations or data collected demonstrates noncompliance with an emission limitation or standard or any work practice or operating condition required by the permit; or,
- (4) A situation in which an excursion or exceedance as defined in 40CFR Part 64 (the Compliance Assurance Monitoring (CAM) Rule) has occurred. (only if the emission point is subject to CAM)

For reporting purposes, the Division has combined the Monitoring Deviation Report with the Permit Deviation Report. All deviations shall be reported using the following codes:

1 = Standard: When the requirement is an emission limit or standard 2 = Process: When the requirement is a production/process limit

3 = Monitor: When the requirement is monitoring 4 = Test: When the requirement is testing

5 = Maintenance: When required maintenance is not performed
 6 = Record: When the requirement is recordkeeping
 7 = Report: When the requirement is reporting

**8 = CAM:** A situation in which an excursion or exceedance as defined in 40CFR Part 64 (the

Compliance Assurance Monitoring (CAM) Rule) has occurred.

**9 = Other:** When the deviation is not covered by any of the above categories

## Report #3: Compliance Certification (annually, as defined in the permit)

Submission of compliance certifications with terms and conditions in the permit, including emission limitations, standards, or work practices, is required not less than annually.

Compliance Certifications are intended to state the compliance status of each requirement of the permit over the certification period. They must be based, at a minimum, on the testing and monitoring methods specified in the

permit that were conducted during the relevant time period. In addition, if the owner or operator knows of other material information (i.e. information beyond required monitoring that has been specifically assessed in relation to how the information potentially affects compliance status), that information must be identified and addressed in the compliance certification. The compliance certification must include the following:

- The identification of each term or condition of the permit that is the basis of the certification;
- Whether or not the method(s) used by the owner or operator for determining the compliance status with each permit term and condition during the certification period was the method(s) specified in the permit. Such methods and other means shall include, at a minimum, the methods and means required in the permit. If necessary, the owner or operator also shall identify any other material information that must be included in the certification to comply with section 113(c)(2) of the Federal Clean Air Act, which prohibits knowingly making a false certification or omitting material information;
- The status of compliance with the terms and conditions of the permit, and whether compliance was continuous or intermittent. The certification shall identify each deviation and take it into account in the compliance certification. Note that not all deviations are considered violations.
- Such other facts as the Division may require, consistent with the applicable requirements to which the source is subject, to determine the compliance status of the source.

The Certification shall also identify as possible exceptions to compliance any periods during which compliance is required and in which an excursion or exceedance as defined under 40 CFR Part 64 (the Compliance Assurance Monitoring (CAM) Rule) has occurred. (only for emission points subject to CAM)

Note the requirement that the certification shall identify each deviation and take it into account in the compliance certification. Previously submitted deviation reports, including the deviation report submitted at the time of the annual certification, may be referenced in the compliance certification.

For example, given the various emissions limitations and monitoring requirements to which a source may be subject, a deviation from one requirement may not be a deviation under another requirement which recognizes an exception and/or special circumstances relating to that same event.

# Startup, Shutdown, Malfunctions and Emergencies

Understanding the application of Startup, Shutdown, Malfunctions and Emergency Provisions, is very important in both the deviation reports and the annual compliance certifications.

## Startup, Shutdown, and Malfunctions

Please note that exceedances of some New Source Performance Standards (NSPS) and Maximum Achievable Control Technology (MACT) standards that occur during Startup, Shutdown or Malfunctions may not be considered to be non-compliance since emission limits or standards often do not apply unless specifically stated in the NSPS. Such exceedances must, however, be reported as excess emissions per the NSPS/MACT rules and would still be noted in the deviation report. In regard to compliance certifications, the permittee should be confident of the information related to those deviations when making compliance determinations since they are subject to Division review. The concepts of Startup, Shutdown and Malfunctions also exist for Best Available Control Technology (BACT) sources, but are not applied in the same fashion as for NSPS and MACT sources.

## **Emergency Provisions**

Under the Emergency provisions of Part 70 certain operational conditions may act as an affirmative defense against enforcement action if they are properly reported.

#### **DEFINITIONS**

**Malfunction** (NSPS) means any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner. Failures that are caused in part by poor maintenance or careless operation are not malfunctions.

**Malfunction** (SIP) means any sudden and unavoidable failure of air pollution control equipment or process equipment or unintended failure of a process to operate in a normal or usual manner. Failures that are primarily caused by poor maintenance, careless operation, or any other preventable upset condition or preventable equipment breakdown shall not be considered malfunctions.

**Emergency** means any situation arising from sudden and reasonably unforeseeable events beyond the control of the source, including acts of God, which situation requires immediate corrective action to restore normal operation, and that causes the source to exceed a technology-based emission limitation under the permit, due to unavoidable increases in emissions attributable to the emergency. An emergency shall not include noncompliance to the extent caused by improperly designed equipment, lack of preventative maintenance, careless or improper operation, or operator error.

Operating Permit 09OPGA339

# **Monitoring and Permit Deviation Report - Part I**

- 1. Following is the **required** format for the Monitoring and Permit Deviation report to be submitted to the Division as set forth in General Condition 21. The Table below must be completed for all equipment or processes for which specific Operating Permit terms exist.
- 2. Part II of this Appendix B shows the format and information the Division will require for describing periods of monitoring and permit deviations, or malfunction or emergency conditions as indicated in the Table below. One Part II Form must be completed for each Deviation. Previously submitted reports (e.g. EER's or malfunctions) may be referenced and the form need not be filled out in its entirety.

| FACILITY NAME: Bill Barrett Bailey |  |
|------------------------------------|--|
| OPERATING PERMIT NO: 09OPGA339     |  |
| REPORTING PERIOD:                  | (see first page of the permit for specific reporting period and dates) |

| Operating<br>Permit Unit |   |     | ations<br>During<br>od? <sup>1</sup> | Deviation Code <sup>2</sup> | Malfunction/Emergency Condition Reported During Period? |    |  |
|--------------------------|---|-----|--------------------------------------|-----------------------------|---|----|--|
| ID                       | Unit Description  | YES | NO                                   |                             | YES   | NO |  |
| ENG01                    | Caterpillar G3612, Natural Gas Fired RICE, 3665 HP                  |     |                                      |                             |   |    |  |
| ENG02                    | Caterpillar G3612, Natural Gas Fired RICE, 3665 HP                  |     |                                      |                             |   |    |  |
| ENG03                    | Caterpillar G3616, Natural Gas Fired RICE, 4890 HP                  |     |                                      |                             |   |    |  |
| ENG04                    | Caterpillar G3616, Natural Gas Fired RICE, 4890 HP                  |     |                                      |                             |   |    |  |
| ENG05                    | Caterpillar G3616, Natural Gas Fired RICE, 4890 HP                  |     |                                      |                             |   |    |  |
| ENG06                    | Caterpillar G3616, Natural Gas Fired RICE, 4890 HP                  |     |                                      |                             |   |    |  |
| ENG07                    | Caterpillar G3612 or G3616, Natural Gas Fired RICE, 3665 or 4890 HP |     |                                      |                             |   |    |  |
| TEG01                    | Natco Triethylene Glycol Dehydrator, 40MMscf/d                      |     |                                      |                             |   |    |  |
| TEG02                    | JW Williams Triethylene Glycol Dehydrator, 40MMscf/d                |     |                                      |                             |   |    |  |
| TEG03                    | Natco Triethylene Glycol Dehydrator, 40 MMscf/d                     |     |                                      |                             |   |    |  |
| TEG04                    | Triethylene Glycol Dehydrator, 40MMscf/d                            |     |                                      |                             |   |    |  |
| TNK01-07                 | Condensate Tank Battery, 7 storage tanks, 400bbl capacity each      |     |                                      |                             |   |    |  |
| FUG                      | Fugitive VOC from Equipment Leaks                                   |     |                                      |                             |   |    |  |
| FLARE                    | Leeds Flare   |     |                                      |                             |   |    |  |
| LOADING                  | Tank Truck Loadout  |     |                                      |                             |   |    |  |
|                          | General Conditions  |     |                                      |                             |   |    |  |
|                          | Insignificant Activities  |     |                                      |                             | -   |    |  |

<sup>&</sup>lt;sup>1</sup> See previous discussion regarding what is considered to be a deviation. Determination of whether or not a deviation has occurred shall be based on a reasonable inquiry using readily available information.

<sup>&</sup>lt;sup>2</sup> Use the following entries, as appropriate

1 = Standard: When the requirement is an emission limit or standard 2 = Process: When the requirement is a production/process limit

**3 = Monitor:** When the requirement is monitoring **4 = Test:** When the requirement is testing

5 = Maintenance: When required maintenance is not performed
 6 = Record: When the requirement is recordkeeping
 7 = Report: When the requirement is reporting

**8 = CAM:** A situation in which an excursion or exceedance as defined in 40CFR Part 64 (the

Compliance Assurance Monitoring (CAM) Rule) has occurred.

**9 = Other:** When the deviation is not covered by any of the above categories

# **Monitoring and Permit Deviation Report - Part II**

| FACILITY NAME: Bill Barrett Bailey OPERATING PERMIT NO: 090PGA339 REPORTING PERIOD: |                   |             |             |
|---|-------------------|-------------|-------------|
| Is the deviation being claimed as an:   | Emergency         | Malfunction | N/A         |
| (For NSPS/MACT) Did the deviation occur during:                                     | Startup           | Shutdown    | Malfunction |
|   | Normal Operation  |             |             |
| OPERATING PERMIT UNIT IDENTIFICATION:   |                   |             |             |
| Operating Permit Condition Number Citation  |                   |             |             |
|   |                   |             |             |
| Explanation of Period of Deviation  |                   |             |             |
|   |                   |             |             |
| Duration (start/stop date & time)   |                   |             |             |
|   |                   |             |             |
| Action Taken to Correct the Problem   |                   |             |             |
|   |                   |             |             |
| Measures Taken to Prevent a Reoccurrence of the Pr                                  | roblem            |             |             |
|   |                   |             |             |
| Dates of Malfunctions/Emergencies Reported (if app                                  | olicable)         |             |             |
|   |                   |             |             |
|   |                   |             |             |
| Deviation Code  | Division Code QA: |             |             |
|   |                   |             |             |

SEE EXAMPLE ON THE NEXT PAGE

# **EXAMPLE**

| FACILITY NAME:<br>OPERATING PERMIT NO:<br>REPORTING PERIOD: |                          |                             |                 |    |      |
|---|--------------------------|-----------------------------|-----------------|----|------|
| Is the deviation being claimed                              | d as an:                 | Emergency                   | _ Malfunction _ | XX | N/A  |
| (For NSPS/MACT) Did the d                                   | leviation occur during:  | Startup<br>Normal Operation |                 |    | tion |
| OPERATING PERMIT UNI  | T IDENTIFICATION:        |                             |                 |    |      |
| Asphalt Plant with a Scrubbe                                | r for Particulate Contro | l - Unit XXX                |                 |    |      |
| Operating Permit Condition 1                                | Number Citation          |                             |                 |    |      |
| Section II, Condition 3.1 - Op                              | pacity Limitation        |                             |                 |    |      |
| Explanation of Period of Dev                                | riation                  |                             |                 |    |      |
| Slurry Line Feed Plugged                                    |                          |                             |                 |    |      |
| <u>Duration</u>   |                          |                             |                 |    |      |
| START- 1730 4/10/06<br>END- 1800 4/10/06                    |                          |                             |                 |    |      |
| Action Taken to Correct the I                               | <u>Problem</u>           |                             |                 |    |      |
| Line Blown Out  |                          |                             |                 |    |      |
| Measures Taken to Prevent R                                 | Reoccurrence of the Pro  | <u>blem</u>                 |                 |    |      |
| Replaced Line Filter  |                          |                             |                 |    |      |
| Dates of Malfunction/Emerge                                 | encies Reported (if app  | licable)                    |                 |    |      |
| 5/30/06 to J. Garcia, APCD                                  |                          |                             |                 |    |      |
| Deviation Code  |                          | Division Code QA:           |                 |    |      |

# **Monitoring and Permit Deviation Report - Part III**

# REPORT CERTIFICATION

| FACILITY IDENTIFICATION NU                 | MBER: 045/0186                |  |
|--|-------------------------------|--|
| PERMIT NUMBER: 090PGA339                   |                               |  |
| REPORTING PERIOD:                          | (see first page of the        | permit for specific reporting period and dates)  |
|  | 3, Part A, Section I.B.38. Th | nust be certified by a responsible official as an ais signed certification document must be  |
| STATEMENT OF COMPLETEN                     | NESS                          |  |
|  | O .                           | y and, based on information and belief<br>and information contained in this submittal  |
| 1-501(6), C.R.S., makes any false          | material statement, represer  | who knowingly, as defined in Sub-Section 18-<br>ntation, or certification in this document is<br>with the provisions of Sub-Section 25-7 |
|  |                               |  |
| Printed or Typed Nai                       | me                            | Title  |
| Printed or Typed Nar Signature of Response |                               | Title  Date Signed   |

#### APPENDIX C

## **Required Format for Annual Compliance Certification Reports**

Following is the format for the Compliance Certification report to be submitted to the Division and the U.S. EPA annually based on the effective date of the permit. The Table below must be completed for all equipment or processes for which specific Operating Permit terms exist.

| FACILITY NAME:       | Bill Barrett Bailey |
|----------------------|---------------------|
| OPERATING PERMIT NO: | 09OPGA339           |
| REPORTING PERIOD:    |                     |

## I. Facility Status

| During the entire reporting period, this source was in compliance with <b>ALL</b> terms and conditions contained |
|--|
| in the Permit, each term and condition of which is identified and included by this reference. The method(s)      |
| used to determine compliance is/are the method(s) specified in the Permit.                                       |
|  |

With the possible exception of the deviations identified in the table below, this source was in compliance with all terms and conditions contained in the Permit, each term and condition of which is identified and included by this reference, during the entire reporting period. The method used to determine compliance for each term and condition is the method specified in the Permit, unless otherwise indicated and described in the deviation report(s). Note that not all deviations are considered violations.

| Operating Permit Unit ID | Unit Description   | Deviations | Reported <sup>1</sup> | Metho | toring<br>od per<br>nit? <sup>2</sup> | Was compliance continuous or intermittent? <sup>3</sup> |              |  |
|--------------------------|--|------------|-----------------------|-------|---------------------------------------|---|--------------|--|
| CIII ID                  |  | Previous   | Current               | YES   | NO                                    | Continuous  | Intermittent |  |
| ENG01                    | Caterpillar G3612, Natural Gas Fired RICE, 3665 HP                     |            |                       |       |                                       |   |              |  |
| ENG02                    | Caterpillar G3612, Natural Gas Fired RICE, 3665 HP                     |            |                       |       |                                       |   |              |  |
| ENG03                    | Caterpillar G3616, Natural Gas Fired RICE, 4890 HP                     |            |                       |       |                                       |   |              |  |
| ENG04                    | Caterpillar G3616, Natural Gas Fired RICE, 4890 HP                     |            |                       |       |                                       |   |              |  |
| ENG05                    | Caterpillar G3616, Natural Gas Fired RICE, 4890 HP                     |            |                       |       |                                       |   |              |  |
| ENG06                    | Caterpillar G3616, Natural Gas Fired RICE, 4890 HP                     |            |                       |       |                                       |   |              |  |
| ENG07                    | Caterpillar G3612 or G3616, Natural<br>Gas Fired RICE, 3665 or 4890 HP |            |                       |       |                                       |   |              |  |
| TEG01                    | Natco Triethylene Glycol Dehydrator,<br>40MMscf/d                      |            |                       |       |                                       |   |              |  |
| TEG02                    | JW Williams Triethylene Glycol<br>Dehydrator, 40MMscf/d                |            |                       |       |                                       |   |              |  |
| TEG03                    | Natco Triethylene Glycol Dehydrator,<br>40 MMscf/d                     |            |                       |       |                                       |   |              |  |

| Operating Permit Unit ID | Unit Description   | Deviations Reported <sup>1</sup> |         | Monitoring<br>Method per<br>Permit? <sup>2</sup> |    | Was compliance continuous or intermittent? <sup>3</sup> |              |
|--------------------------|--|----------------------------------|---------|--|----|---|--------------|
| Oint 1D                  |  | Previous                         | Current | YES  | NO | Continuous  | Intermittent |
| TEG04                    | Triethylene Glycol Dehydrator,<br>40MMscf/d                    |                                  |         |  |    |   |              |
| TNK01-<br>07             | Condensate Tank Battery, 7 storage tanks, 400bbl capacity each |                                  |         |  |    |   |              |
| FUG                      | Fugitive VOC from Equipment Leaks                              |                                  |         |  |    |   |              |
| FLARE                    | Leeds Flare  |                                  |         |  |    |   |              |
| LOADIN<br>G              | Tank Truck Loadout   |                                  |         |  |    |   |              |
|                          | General Conditions   |                                  |         |  |    |   |              |
|                          | Insignificant Activities                                       |                                  |         |  |    |   |              |

<sup>&</sup>lt;sup>1</sup> If deviations were noted in a previous deviation report, put an "X" under "previous". If deviations were noted in the current deviation report (i.e. for the last six months of the annual reporting period), put an "X" under "current". Mark both columns if both apply.

#### NOTE:

The Periodic Monitoring requirements of the Operating Permit program rule are intended to provide assurance that even in the absence of a continuous system of monitoring the Title V source can demonstrate whether it has operated in continuous compliance for the duration of the reporting period. Therefore, if a source 1) conducts all of the monitoring and recordkeeping required in its permit, even if such activities are done periodically and not continuously, and if 2) such monitoring and recordkeeping does not indicate non-compliance, and if 3) the Responsible Official is not aware of any credible evidence that indicates non-compliance, then the Responsible Official can certify that the emission point(s) in question were in continuous compliance during the applicable time period.

<sup>&</sup>lt;sup>2</sup> Note whether the method(s) used to determine the compliance status with each term and condition was the method(s) specified in the permit. If it was not, mark "no" and attach additional information/explanation.

<sup>&</sup>lt;sup>3</sup> Note whether the compliance status with each term and condition provided was continuous or intermittent. "Intermittent Compliance" can mean either that noncompliance has occurred or that the owner or operator has data sufficient to certify compliance only on an intermittent basis. Certification of intermittent compliance therefore does not necessarily mean that any noncompliance has occurred.

<sup>&</sup>lt;sup>4</sup> Compliance status for these sources shall be based on a reasonable inquiry using readily available information.

| II.  | Status   | for Ac   | ccidental Relea  | se Prevention   | Prograr           | n:   |                |                          |                         |                                  |                             |  |                            |
|--|--|--|--|---|-------------------|--|----------------|--------------------------|-------------------------|----------------------------------|-----------------------------|--|----------------------------|
|  | A.   |  | facility   | is subject<br>Program (Sec  |                   |  |                |                          |                         |                                  |                             | Acciden  | ıtal                       |
| B. If subject: The facility is is not in compliand requirements of section 112(r). |  |  |  |   |                   |  |                | liance                   | with a                  | ıll the                          |                             |  |                            |
|  |  | 1.   |  | agement Plan<br>authority and/                                      |                   |  |                |                          |                         |                                  |                             |  |                            |
| III.   | Certif   | ication  |  |   |                   |  |                |                          |                         |                                  |                             |  |                            |
| Colora the do I have reason accur Please C.R.S                                     | ado Reg<br>cument<br>e reviev<br>nable in<br>ate and<br>e note t | gulation s being wed this nquiry, I compl hat the es any f | the Annual Con<br>in No. 3, Part A<br>g submitted.<br>is certification<br>, I certify that<br>lete.<br>e Colorado Sta<br>false material<br>may be punish | in its entiret<br>the statemen<br>atutes state the<br>statement, re | y and, buts and i | esigned  pased or  informat  person  tation, o | certinion info | ormati<br>conta<br>knowi | on and ined in ingly, a | ment n  I belie this c  as defin | f form<br>ertific<br>ned in | e package<br>ned after<br>cation ar<br>a § 18-1-5<br>ent is gu | ed with  re true,  501(6), |
|  |  | Printe   | ed or Typed Na   | ame   |                   |  |                |                          |                         |                                  | Titl                        | le   |                            |
|  |  | (  | Signature  |   |                   |  |                |                          |                         |                                  | Date                        | Signed   |                            |
| NOTE   | : All con  | npliance   | certifications sha   | ll be submitted to  | o the Air I       | Pollution                                      | Contr          | rol Divis                | ion and                 | to the E                         | nvironn                     | nental Pro   | tection                    |

Agency at the addresses listed in Appendix D of this Permit.

#### APPENDIX D

#### **Notification Addresses**

#### 1. **Air Pollution Control Division**

Colorado Department of Public Health and Environment Air Pollution Control Division Operating Permits Unit APCD-SS-B1 4300 Cherry Creek Drive S. Denver, CO 80246-1530

ATTN: Matt Burgett

## 2. United States Environmental Protection Agency

## Compliance Notifications:

Office of Enforcement, Compliance and Environmental Justice Mail Code 8ENF-T U.S. Environmental Protection Agency, Region VIII 1595 Wynkoop Street Denver, Colorado 80202-1129

## Permit Modifications, Off Permit Changes:

Office of Partnerships and Regulatory Assistance Air and Radiation Programs, 8P-AR U.S. Environmental Protection Agency, Region VIII 1595 Wynkoop Street Denver, Colorado 80202-1129

#### APPENDIX E

## **Permit Acronyms**

## Listed Alphabetically:

| A TD C  |   |
|---------|---|
| AIRS -  | Aerometric Information Retrieval System               |
| AP-42 - | EPA Document Compiling Air Pollutant Emission Factors |
| APEN -  | Air Pollution Emission Notice (State of Colorado)     |
| APCD -  | Air Pollution Control Division (State of Colorado)    |
| ASTM -  | American Society for Testing and Materials            |
| BACT -  | Best Available Control Technology                     |
| BTU -   | British Thermal Unit                                  |
| CAA -   | Clean Air Act (CAAA = Clean Air Act Amendments)       |
| CCR -   | Colorado Code of Regulations                          |
| CEM -   | Continuous Emissions Monitor                          |
| CF -    | Cubic Feet (SCF = Standard Cubic Feet)                |
| CFR -   | Code of Federal Regulations                           |
| CO -    | Carbon Monoxide                                       |
| COM -   | Continuous Opacity Monitor                            |
| CRS -   | Colorado Revised Statute                              |
| EF -    | Emission Factor                                       |
| EPA -   | Environmental Protection Agency                       |
| FI -    | Fuel Input Rate (MMBtu/hr)                            |
| FR -    | Federal Register                                      |
| G -     | Grams   |
| Gal -   | Gallon  |

HAPs - Hazardous Air Pollutants HP - Horsepower

GPM -

HP-HR - Horsepower Hour (G/HP-HR = Grams per Horsepower Hour)

LAER - Lowest Achievable Emission Rate

Gallons per Minute

LB - Pounds
M - Thousand
MM - Million

MMscf - Million Standard Cubic Feet

MMscfd - Million Standard Cubic Feet per Day

N/A or NA - Not Applicable NOx - Nitrogen Oxides

NESHAP - National Emission Standards for Hazardous Air Pollutants

NSPS - New Source Performance Standards P - Process Weight Rate in Tons/Hr

PE - Particulate Emissions PM - Particulate Matter

PM<sub>10</sub> - Particulate Matter Under 10 Microns

Issued: June 1, 2012

| PSD - | Prevention of Significant Deterioration |
|-------|---|
| PTE - | Potential To Emit                       |

RACT - Reasonably Available Control Technology

SCC - Source Classification Code

SCF - Standard Cubic Feet

SIC - Standard Industrial Classification

SO<sub>2</sub> - Sulfur Dioxide TPY - Tons Per Year

TSP - Total Suspended Particulate VOC - Volatile Organic Compounds

# APPENDIX F

# **Permit Modifications**

| DATE OF<br>REVISION | TYPE OF<br>REVISION         | SECTION NUMBER,<br>CONDITION NUMBER | DESCRIPTION OF REVISION   |
|---------------------|-----------------------------|-------------------------------------|---|
| 11/29/2012          | Administrative<br>Amendment | Page following cover page           | Revised the expiration date to reflect five years after issuance. |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |
|                     |                             |                                     |   |

Issued: June 1, 2012

#### **APPENDIX G**

# **Engine AOS Applicability Reports**

ver 12/10/08

Note: A MS Word version of this Appendix can be found at:

http://www.cdphe.state.co.us/ap/oilgaspermitting.html

## **DISCLAIMER:**

These are only example reports and do not cover all possible requirements.

# **Engine AOS Applicability Report Certification Language**

All information for the Applicability Reports must be certified by either 1) for Operating Permits, a Responsible Official as defined in Colorado Regulation No. 3, Part A, Section I.B.38. or 2) for Construction and General Permits, the person legally authorized to act on behalf of the source. This signed certification document must be packaged with the documents being submitted.

I have reviewed this certification in its entirety and, based on information and belief formed after reasonable inquiry, I certify that the statements and information contained in this certification are true, accurate and complete. Further, I agree that by signing and submitting these documents I agree that any new requirements identified in the Applicability Report(s) shall be considered to be Applicable Requirements as defined in Colorado Regulation No. 3, section I.B.9., and that such requirements shall be enforceable by the Division and its agents and shall be considered to be revisions to the underlying permit(s) referenced in the Report(s) until such time as the Permit is revised to reflect the new requirements.

Please note that the Colorado Statutes state that any person who knowingly, as defined in § 18-1-501(6), C.R.S., makes any false material statement, representation, or certification in this document is guilty of a misdemeanor and may be punished in accordance with the provisions of § 25-7 122.1, C.R.S.

| Printed or Typed Name |             |
|-----------------------|-------------|
|                       |             |
| Title                 |             |
|                       |             |
| Signature             | Date Signed |

Issued: June 1, 2012

# Colorado Regulation No. 7 Sections XVI and XVII.E

DISCLAIMER: This is only an example report and does not cover all possible Reg 7 requirements.

Company: Acme Gas Processing

Source ID: 999/1234/001 Permit #: 93OPXX999 Date: October 1, 2008

Determination of compliance and reporting requirements for a

Manufacturer: BestEngineCompany

Model: 777 LowNox

Nameplate HP: 1340

Construction date: July 1, 2007

Note: If the engine is exempt from a requirement due to construction date or was relocated from within Colorado, supporting documentation must be provided.

## **Determination of Regulation No. 7 requirements:**

## Regulation No. 7, § XVI

| Does not apply to this engine. Engine is not located in the ozone nonattainment area or does not have a manufacturer's design rate greater than 500 horsepower or did not commence operation on or after June 1, 2004. |  |  |  |  |
|--|--|--|--|--|
| Does apply to this engine and applicable emissions controls have been installed.   |  |  |  |  |
| Regulation No. 7, § XVII.E   |  |  |  |  |
| Does not apply to this engine. Engine does not have a maximum horsepower greater than 100 or the construction or relocation date precedes the applicability dates.   |  |  |  |  |
| Does apply to this engine. The following emission limits apply to the engine:  |  |  |  |  |
| $NO_X$ (g/hp-hr): 2.0  |  |  |  |  |
| CO (g/hp-hr): 4.0  |  |  |  |  |
| VOC (g/hp-hr): 1.0   |  |  |  |  |

| Max Engine HP   | Construction or | Emission Standards in g/hp-hr |     |     |
|---|-----------------|-------------------------------|-----|-----|
| Max Eligille HP   | Relocation Date | $NO_X$                        | СО  | VOC |
| 100 <hp<500< td=""><td>January 1, 2008</td><td>2.0</td><td>4.0</td><td>1.0</td></hp<500<> | January 1, 2008 | 2.0                           | 4.0 | 1.0 |
|   | January 1, 2011 | 1.0                           | 2.0 | 0.7 |
| 500 <u>≤</u> Hp   | July 1, 2007    | 2.0                           | 4.0 | 1.0 |
|   | July 1, 2010    | 1.0                           | 2.0 | 0.7 |

Operating Permit 09OPGA339

# **NSPS JJJJ Example Report Format**

## DISCLAIMER: This is only an example report and does not cover all possible JJJJ requirements.

Note that as of September 1, 2008 that the Division has not yet adopted NSPS JJJJ. Until such time as it does, any engine subject to NSPS will be subject only under Federal law. Once the Division adopts NSPS JJJJ, there will be an additional step added to the determination of the NSPS. Under the provisions of Regulation No. 6, Part B, § I.B (which is referenced in Part A), any engine relocated from outside of the State of Colorado into the State of Colorado is considered to be a new source, subject to the requirements of NSPS JJJJ.

# NSPS Subpart JJJJ: Standards of Performance for Stationary Spark Ignition Internal Combustion Engines

Company: Acme Gas Processing

Source ID: 999/1234/001 Permit #: 93OPXX999 Date: October 1, 2008

Manufacturer: BestEngineCompany

Model: 777 LowNox

Nameplate HP: 1340

Engine Type: 2 Stroke Rich Burn

Manufacture Date: July 1, 2007 Date Engine Ordered: April 1, 2007

Note: If the engine is exempt from a requirement due to construction/manufacture date, supporting documentation must be provided.

Upon adoption of NSPS Subpart JJJJ into Colorado Regulation No. 6, Part A, if the engine is exempt because the engine was relocated within the state of Colorado, supporting documentation must be provided.

NSPS JJJJ does not apply to this engine.

|  | NSPS | JJJJ | does | apply | to | this | engi | ne. |
|--|------|------|------|-------|----|------|------|-----|

Note: Using the format below, the source must submit to the Division an analysis of all of the NSPS JJJJ applicable requirements that apply to this specific engine. **The analysis below is an example only**, based on a hypothetical engine that is a rich burn engine, greater than 500 HP, with a manufacture date after July 1, 2007.

Issued: June 1, 2012

# <u>Determination of NSPS JJJJ requirements:</u>

## 60.4230 Applicability

(a)(4)(i) Applies to this engine since it is a rich burn engine, greater than 500 HP, with a manufacture date after July 1, 2007.

## **60.4233 Emission Standards for Owners and Operators**

(e) Owners and operators of stationary SI ICE with a maximum engine power greater than 100 HP must comply with the standards in Table 1.

Non-Emergency SI, Natural Gas, HP≥500, Manufactured after 7/1/2007

NO<sub>x</sub> 2.0 g/HP-hr or 160 ppmvd@15% O<sub>2</sub> CO 4.0 g/HP-hr or 540 ppmvd@15% O<sub>2</sub> VOC 1.0 g/HP-hr or 86 ppmvd@15% O<sub>2</sub>

## Other Requirements for Owners and Operators

| 60.4234 | Emission standards must be met for the lifetime of the engine. |
|---------|--|
|---------|--|

- 60.4235 N/A Sulfur content of gasoline.
- 60.4236 N/A (for now) After July 1, 2009 owners and operators may not install engines with a power rating  $\geq$  500HP that do not meet the emissions standards in 60.4230.
- 60.4237 N/A Emergency Engines.

## **60.4238 - 60.4242** Compliance Requirements for Manufacturers – (Not Applicable)

## **60.4243** Compliance Requirements for Owners and Operators

- (b)(2)(ii) To maintain compliance with the emission limits in 60.4233, owners of SI ICE  $\geq 500$ HP must:
  - Keep a maintenance plan;
  - Keep records of conducted maintenance;
  - Maintain and operate the engine in a manner consistent with good air pollution control practice for minimizing emissions;
  - Conduct an initial performance test; and
  - Conduct subsequent performance tests every 8,760 hours or every three years, which ever comes first, in order to demonstrate compliance with the emission limits.
- (g) Air to fuel ratio controllers (AFRCs) must be maintained and operated appropriately in order to ensure proper operation of the engine and control device to minimize emissions at all times.

## **60.4244 Testing Requirements for Owners and Operators**

(a) Each performance test must be conducted within 10% of the highest achievable load and must comply with the testing requirements listed in 60.8 and Table 2 of NSPS JJJJ.

Operating Permit 09OPGA339 Issued: June 1, 2012

- (b) Performance tests may not be conducted during periods of startup, shutdown, or malfunction, as specified in 60.8(c). If the engine is non-operational when a performance test is due, the engine does not need to be started up just to test it, but will need to be tested immediately upon startup.
- (c) Three separate test runs must be conducted for each performance test as specified by 60.8(f). Each run must be within 10% of max load and be at least 1 hour in duration.
- (d) To determine compliance with the NO<sub>x</sub>, CO, and VOC mass per unit output emission limitations, the measured concentration must be converted using the equations outlined in this section of NSPS JJJJ.

## 60.4245 Notification, Reports, and Records for Owners and Operators

- (a) Owners of all stationary SI ICE must keep records of the following:
  - (1) All notifications submitted to comply with this subpart;
  - (2) Maintenance conducted on the engine;
  - (3) N/A Manufacturer information for certified engines, and
  - (4) Documentation that shows non-certified engines are in compliance with the emission standards.
- (b) N/A For emergency engines only.
- Owners of non-certified engines  $\geq$  500HP must submit an initial notification as required in 60.7(a)(1) which includes the following information:
  - (1) Name and address of the owner or operator;
  - (2) The address of the affected source;
  - (3) Engine information including make, model, engine family, serial number, model year, maximum engine power, and engine displacement;
  - (4) Emission control equipment; and
  - (5) Fuel used.

#### **CONCLUSION OF FINDINGS (EXAMPLE ONLY)**

In general, Acme's 1,235HP, Waukesha 7042 GSI engine is subject to the emissions limitations summarized in Table 1 of NSPS JJJJ. ACME will meet these emission limitations using an AFRC and a non-selective catalytic converter (NSCR). These emission rates will be met throughout the life of the engine. A maintenance plan will be kept and all maintenance activities will be recorded. Compliance with the emission limits will be confirmed by the initial performance tests, which shall be conducted following the procedures outlined in 60.4244. Copies of performance test results will be submitted within 60 days of the completion of each test. Since this is an uncertified engine, an initial notification will be submitted including all of the requested information in 40.4245 within 30 days of startup. ACME will keep records of all compliance related materials.

Operating Permit 09OPGA339

Issued: June 1, 2012

# MACT ZZZZ Area Source Example Report Format

DISCLAIMER: This is only an example report and does not cover all possible ZZZZ requirements.

# MACT Subpart ZZZZ: National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines

Company: Acme Gas Processing

Source ID: 999/1234/001 Permit #: 93OPXX999 Date: October 1, 2008

Manufacturer: Best Engine Company

Model: 777 LowNox

Nameplate HP: 1340

Engine Type: 2 Stroke Rich Burn

Manufacture Date: July 1, 2007 Date Engine Ordered: April 1, 2007

Note: If the engine is exempt from a requirement due to construction/reconstruction date, supporting documentation must be provided.

| MACT ZZZZ does not apply | to this | engine. |
|--------------------------|---------|---------|
|--------------------------|---------|---------|

☐ MACT ZZZZ does apply to this engine.

Note: Using the format below, the source must submit to the Division an analysis of all of the area source MACT ZZZZ applicable requirements that apply to this specific engine. **The analysis below is an example only**, based on a hypothetical new engine located at an area source of HAP emissions.

# Determination of MACT ZZZZ requirements:

## 63.6585 Applicability

This subpart is applicable to Acme's engine since they are going to be operating a new stationary reciprocating internal combustion engine (RICE) at an area source of HAP emissions.

## 63.6590 What Parts of My Plant Does This Subpart Cover?

(c) A new or reconstructed stationary RICE located at an area source of HAP emissions that is subject to 40 CFR Part 60, must meet the requirements of this part by meeting the requirements of 40 CFR Part 60 subpart JJJJ.

## **CONCLUSION OF FINDINGS (EXAMPLE ONLY)**

Since this engine is subject to NSPS JJJJ, no additional requirements apply under MACT ZZZZ.

Operating Permit 09OPGA339 Issued: June 1, 2012

# MACT ZZZZ Major Source Example Report Format

DISCLAIMER: This is only an example report and does not cover all possible ZZZZ requirements.

## MACT Subpart ZZZZ: National Emissions Standards for Hazardous Air Pollutants for Stationary **Reciprocating Internal Combustion Engines**

Company: Acme Gas Processing

Source ID: 999/1234/001 93OPXX999 Permit # Date: October 1, 2008

Manufacturer: **BestEngineCompany** 

Model: 777 LowNox

Nameplate HP: 1340

Engine Type: 2 Stroke Rich Burn

Manufacture Date: July 1, 2007 Date Engine Ordered: April 1, 2007

Note: If the engine is exempt from a requirement due to construction/reconstruction date, supporting documentation must be provided.

| MACT ZZZZ does not apply to this engine | e. |
|---|----|
| MACT ZZZZ does apply to this engine.    |    |

Note: Using the format below, the source must submit to the Division an analysis of all of the major source MACT ZZZZ applicable requirements that apply to this specific engine. The analysis below is an example **only**, based on a hypothetical new engine located at a major source of HAP emissions.

# <u>Determination of MACT ZZZZ</u> requirements:

## 63.6585 Applicability

This subpart is applicable to Acme's engine since they are going to be operating a new stationary reciprocating internal combustion engine (RICE) at a major source of HAP emissions.

## 63.6590 What Parts of My Plant Does This Subpart Cover?

This subpart covers Acme's new stationary reciprocating internal combustion engine.

## 63.6595 When do I have to comply with this Subpart?

The engine must comply with the applicable emission limitations and operating limitations (a)(5)upon startup.

63.6600 Emission and operating limitations for RICE site rated at more than 500 hp

Operating Permit 09OPGA339 Issued: June 1, 2012

The engine is subject to the emission limits in table 1a and the operating limits in table 1b. ACME will meet the emission limitations by reducing formaldehyde emissions by 76 percent and will maintain the catalyst such that the pressure drop does not change by more than 2 inches of H<sub>2</sub>O at 100 % load plus or minus 10 percent from the pressure drop measured during the initial performance test and will maintain the temperature of the engine exhaust so that the catalyst inlet temperature is greater than or equal to 750 ° F and less than or equal to 1250 ° F.

The engine will be equipped with non-selective catalytic reduction and an air fuel controller to meet the emission limitations.

## 63.6601 & 63.6611 Requirements for 4SLB engines between 250 and 200 hp

These requirements do not apply.

## **63.6605** General Requirements

- (a) The engine will comply with the emission and operating limitations at all times, except during periods of startup, shutdown and malfunction (SSM)
- (b) The engine, including air pollution control and monitoring equipment shall be operating in a manner consistent with good air pollution control practices for minimizing emissions at all times, including during SSM.

# **63.6610** Initial performance test

- (a) the performance tests specified in Table 4 (select sampling port and measure O<sub>2</sub>, moisture and formaldehyde at inlet and outlet of the control device) shall be conducted within 180 days of startup.
- (b) & (c) not applicable construction did not commence between 12/19/02 and 6/15/04.
- (d) previous performance tests have not been conducted on this unit within two years, therefore, this provision does not apply.

## **63.6615** Subsequent performance tests

Subsequent tests will be conducted as specified in Table 3. No additional testing is required for 4SRB engines meeting the formaldehyde percent reduction requirements.

## **63.6620** Performance test procedures

- (b) tests must be conducted at 100 % load plus or minus 10%
- (c) tests may not be conducted during periods of SSM.
- (d) must conduct three 1-hr test runs
- (e) equation (e)(1) shall be used to determine compliance with the percent reduction requirement.
- (f), (g) & (h) Not applicable
- (i) engine load during test shall be determined as specified in this paragraph.

## 63.6625 Monitoring, installation, operation and maintenance requirements

(a), (c) & (d) Not applicable

Issued: June 1, 2012

(b) a continuous parameter monitoring system (CPMS) shall be installed to measure the catalyst inlet temperature. The CPMS will meet the requirements in § 63.8

## 63.6630 Demonstrating initial compliance

- initial compliance shall be determined in accordance with table 5 (initial performance test (a) must indicate formaldehyde reduction of 76 percent or more, a CPMS must be installed to measure inlet temperature of the catalyst and the pressure drop and catalyst inlet temperature must be recorded during the initial performance test).
- pressure differential will be established during the initial performance test. (b)
- Notification of compliance status will be submitted and will contain the results of the (c) initial compliance demonstration.

## 63.6635 Monitoring to demonstrate continuous compliance

- except for monitor malfunctions, associated repairs, and required QA/QC activities (b) monitoring must be continuous at all time the engine is operating.
- data recorded during monitoring malfunctions, associated repairs and required QA/QC (c) activities must not be used in data averages and calculations to report operating levels, however, all the valid data collected during other periods shall be used.

## **63.6640** Demonstrating continuous compliance

- continuous compliance will be demonstrated as specified in table 6 (collect catalyst inlet (a) temperature data, reduce that data to 4-hr rolling average and maintain the 4-hr rolling averages to within the operating limitation and measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop meets the operating limitation.
- deviations from the emission and operating limitations must be reported per § 63.6550. (b) If catalyst is changed the operating parameters established during the initial performance test must be re-established.

When operating parameters re-established a performance test must also be conducted.

#### **63.6645** Notifications

- Submit notifications in §§ 63.7(b) & (c), 63.8(e), (f)(4) and (f)(6), 63.9(b) thru (e) & (g) & (a) (h) that apply by dates specified.
- Not applicable. Acme unit started after effective dated for Subpart ZZZZ. (b)
- (c) Submit initial notification within 120 days after becoming subject to Subpart ZZZZ.
- Not applicable. Acme engine greater than 500 hp and subject to requirements in Subpart (d) thru (f) ZZZZ.
- Submit notification of intent to conduct performance test and notification of compliance (g) & (h) status.

#### **63.6650 Reports**

- (a) Submit reports required by table 7 (compliance report and SSM reports (if actions inconsistent with SSM plan)
- Not applicable, an alternate schedule for report submittal has been approved. Reports will (b) be submitted with title v reports

Issued: June 1, 2012

- (c) Compliance reports to contain the following information: company name and address, statement by responsible official certifying accuracy, date of report and beginning and end of reporting period, if SSM the information in 63.10(d)(5)(i), if no deviations a statement saying that, if no periods when CPMS out of control a statement saying that.
- (d) Not applicable, using CPMS
- (e) For each deviation the information in (e)(1) thru (e)(12) shall be provided.
- (f) Applicable. Compliance reports are submitted with title v reports. Compliance reports under Subpart ZZZZ include all necessary info for title v deviation report with respect to Subpart ZZZZ requirements.
- (g) Not applicable. Acme engine not firing landfill or digester gas.

# 63.6655 Recordkeeping

- (a) Retain records as follows: copy of each notification and report (including all documentation supporting any initial notification or notification of compliance status), records in 63.6(e)(iii) thru (v) related to SSM, and records of performance tests and evaluations.
- (b) CPMS records including records in 63.10(b)(2)(vi) thru (xi), previous versions of the performance evaluation plan required by 63.8(d)(3) and requests for alternatives to the relative accuracy test for CPMS as required by 63.8(f)(6)(i).
- (c) Not applicable. Acme engine not firing landfill or digester gas.
- (d) Will keep records required in Table 6 (monthly pressure drop readings, 4-hr averages of catalyst inlet temperature) to show continuous compliance with emission and operating limits.

## 63.6660 Form and length of records

- (a) records must be in a form suitable and readily available for expeditions review
- (b) records must be retained for five years
- (c) records must be retained on-site for first 2 years, may be retained off-site for the remaining 3 years

#### **63.6665** General Provisions

This engine must comply with the general provisions as indicated in Table 8.

## **CONCLUSION OF FINDINGS (EXAMPLE ONLY)**

Since this engine is subject to the requirements of MACT Subpart ZZZZ. The engine will be installed with a non-selective catalyst to meet the formaldehyde reduction requirement of 76% or more. An initial performance test will be conducted within 180 days of startup to demonstrate compliance with the formaldehyde percent reduction requirement. During the initial performance test, the pressure drop across the catalyst will be measured. A CPMS will be installed to measure the catalyst inlet temperature. Continuous compliance will be demonstrated by keeping the 4-hr rolling averages of catalyst inlet temperature within the operating limitations and recording the pressure drop across the catalyst monthly and demonstrating that the pressure drop is within the operating limitation.

Records, notifications and reports will be submitted as required. To that end required reports and notifications include initial notification, notice of intent to conduct performance test, notification of compliance status, SSM reports (if required) and semi-annual compliance reports.

Operating Permit 09OPGA339

Issued: June 1, 2012